

# Specialty Seals

## IS9050, IS9055, IS9070 Finger Guard Safety Seals

Trapping fingers in hinged doors can cause horrendous injuries. The risk is especially high in locations where young children are present; ie, child care centres, schools, restaurants, fast-food outlets, etc.

The finger guard seals provide the shield. These seals can provide protection on both sides of the door by using the IS9050 or IS9055 on the hinge knuckle side and the IS9070 on the hinge cavity side (opening side) of the door.


IS9070 can be used in conjunction with the IS7025si acoustic seal around the remainder of the door perimeter for a comprehensive sealing and finger deterrent system.

### Standard lengths


- 2250mm
- Also available in: 250mm increments from 1000mm to 3000mm

### Standard colours


- Silver anodised aluminium with grey PVC cover strip and black gasket
- Black anodised aluminium with black PVC cover strip and black gasket
- Brown, grey and cream colour gaskets available to special order

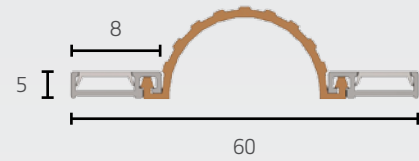

IS9050 Finger Guard Seal - hinge position

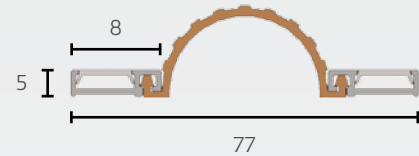



IS9055 Finger Guard Seal - hinge position

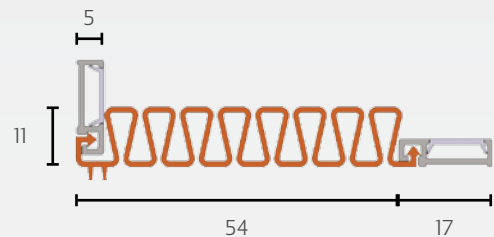

IS9070 Finger Guard Seal

**Right:** Application showing the IS9055 (extended hinge guard seal) fitted across the hinge knuckle on a timber door assembly.

**Right:** Application showing the IS9050 fitted across the hinge knuckle on a timber door/ metal frame assembly.

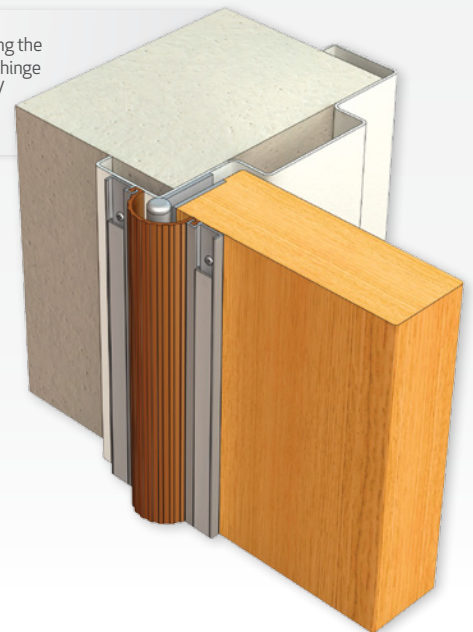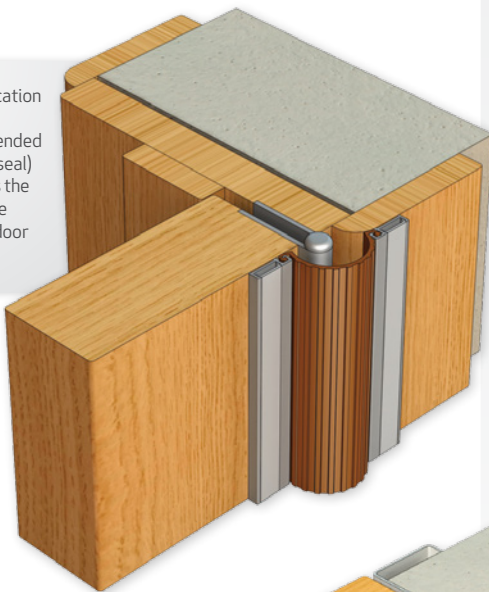

**Right:** Application showing the IS9070 fitted across the hinge cavity on a timber door assembly.

