



Flush Bolts

General hardware



Designed to fit flush when installed to the face or edge of the door the Legge Flush Bolts are a simple and effective method of securing the inactive leaf on a double leaf doorset.

Brass construction, six sizes and three finishes means the Legge range of flush bolts meet any demand.


Features

- 25mm throw
- 12mm diameter bolt
- Visible fixing
- Supplied with screws
- Suitable for timber doors only
- The 10 year warranty provides specifiers and users with assured quality and performance

Specification guide

Model	Size	Finish
Flush bolt DAX1901	150mm -01 200mm -02 300mm -03 450mm -04 600mm -05 900mm -06	Chrome plate CP Polished brass PB Satin chrome plate SCP



1. Model
Select the desired model e.g. Flush bolt DAX1901
2. Size
Select the desired size e.g. 150mm DAX1901-01
3. Finish
Select the desired finish e.g. Polished brass DAX1901-01PB



Code	01	02	03	04	05
A	100mm	200mm	300mm	450mm	600mm

Specifications

Door type	Timber
Door thickness	32mm minimum
Material	Brass
Size	19mm wide, various lengths
Bolt	12mm diameter x 25mm throw
Finishes	Chrome plate, polished brass, satin chrome plate
Warranty	10 year mechanical

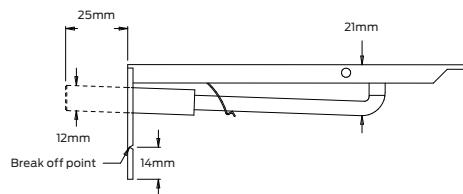

Flush bolt accessories

1760 Top hat ferrule

12mm shoot to suit 1901
Finish: Aluminium, brass

