

Perimeter Seals

IS7010si, IS7020si



The IS7010si and IS7020si are aesthetically designed, slim-line compression type perimeter seals for installation around the head and jambs of single swing doors. They are proven to be effective acoustic, smoke, light, dust and weather seals.

The aluminium carrier is pre-drilled and slotted for adjustable retrofit installation. The easy to install, "snap-on", anodised aluminium cover plates provide concealed fixings.

Gap size

- Min. 0mm / max. 6mm

Door set standard lengths

- Single: 1 x 1000mm, 2 x 2100mm
- Long Single: 1 x 1000mm, 2 x 2750mm
- Double: 3 x 2100mm
- Long Double: 1 x 2100mm, 2 x 2750mm

Standard lengths

- 1000mm
- 2250mm

Also available in individual lengths:

- 250mm increments from 1000mm to 5000mm


Standard colours


- Silver anodised aluminium with grey silicone gasket (Black silicone gaskets also available upon request)

Fixing

- When fixing IS7020si to rebated frames of single doors, specify a long back set door latch

Approval/s

- Fire tested to AS1530 Part 4 in accordance with AS1905 Part 1
-  Certifications GYYI.R26629, GVWZ.R26629, GVWZ7.R26629
- Medium temperature smoke leakage approvals to AS1530 Part 7 available on proprietary door assemblies
- Acoustically tested in accordance with AS1191, ISO140.3 and ISO10140-2




IS7010si



IS7020si

Right: IS7010si perimeter seal fitted to the stop of a steel door frame.

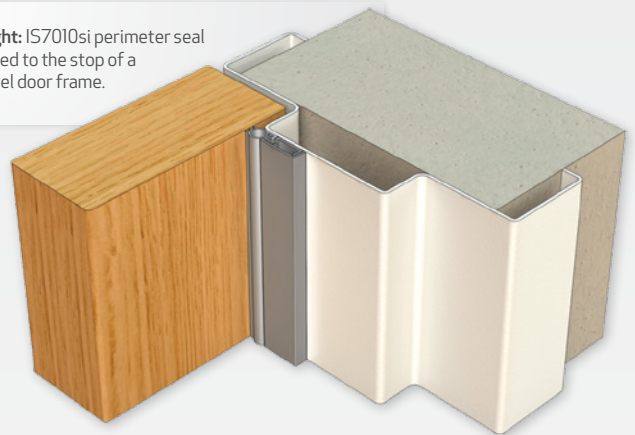

Right: IS7020si perimeter seal fitted to the stop of a steel door frame.

