

Kilargo IS7071si Meeting Style - Astragal Seal


[Click here to view on website](#)



SKU	Length
LO-IS7071SI-2250CA	2250mm
LO-IS7071SI-3000CA	3000mm
LO-IS7071SI-2500CA	2500mm

DESCRIPTION

An astragal seal designed to be fitted to plain or rebated meeting stiles of single swing and double swing, double doors. Two IS7071si seals can be installed onto one stile, allowing a space for a latch between the seals if required. These seals can be surface mounted or rebated. It provides an excellent acoustic, smoke, light, dust and weather seal. IS7071si can be utilised as a perimeter seal around the head and jambs of single and double doors.



Gap Size

- Surface-mounted: Min. 5mm / Max. 7mm
- Rebated application: Min. 2mm / Max. 4mm

Standard Lengths

- 2250mm
- 2500mm
- 3000mm
- Also available in: 250mm increments from 1000mm to 5000mm (Special Order Only)

Standard Finishes



- Silver anodised aluminium with grey silicone twin-fin gasket.
- (black anodised aluminium with black silicone twin-fin gasket to special order)

Fixing

- Fixing screws are supplied
- Fixing holes are pre-drilled and countersunk
- A door sequence selector should be considered unless one leaf is intended to be fixed

Approvals

- Fire tested to AS1530 Part 4 in accordance with AS1905 Part 1 (Perimeter Seal)
- Medium temperature smoke leakage approvals to AS1530 Part 7 available on proprietary door assemblies
- Conforms with NCC Specification C3.4 smoke sealing requirements
- Acoustically tested in accordance with AS1191, ISO140.3 and ISO10140-2
- Durability tests demonstrating over 1,000,000 open & close cycles

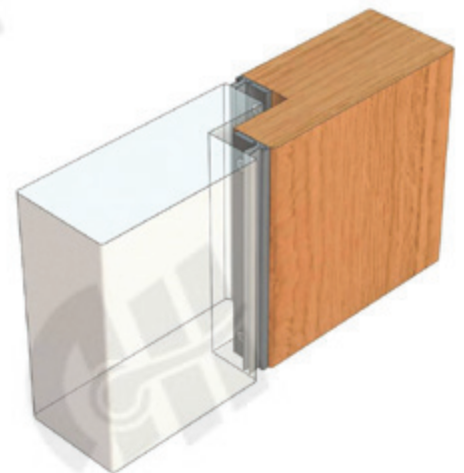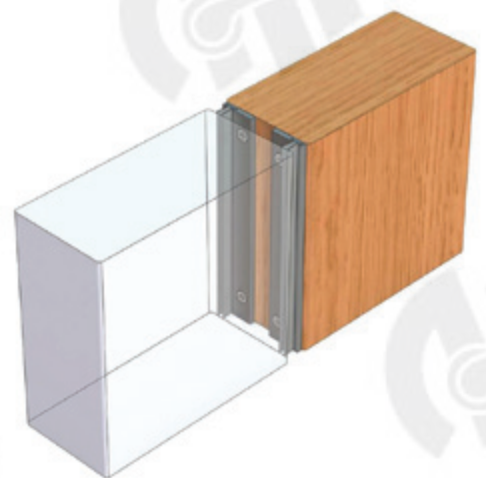

SPECIFICATION

Finish	Silver
Includes Fixing Screws	Yes
Suitable for Smoke Doors	Medium temperature smoke leakage tests to AS1530 Part 7 available on proprietary door assemblies. Conforms with NCC Specification C3.4 smoke sealing requirements.
Fire tested, check with manufacturer for further details.	Fire tested to AS1530 Part 4 in accordance with AS1905 Part 1
Acoustic Rating to AS1191 and ISO140.3	Acoustically tested in accordance with AS1191, ISO140.3 & ISO10140-2
Colour	Silver anodised aluminium with grey PVC cover

Contact

Customer Service: 1800 555 600
Locksmith Services: 1800 555 700
Email: online@accesshardware.com.au
Website: www.accesshardware.com.au

Disclaimer

The specifications on our website are often provided to us by our manufacturers, provided as guidance only. While Access Hardware ensures it deals with reputable manufacturers, it cannot verify the accuracy of every claim made by them about their products as manufacturers often reserve the right to make changes without notice. To the extent permitted by law, We are not liable in respect of any claims made on this website in respect of any specification or claim by a manufacturer for its product.

Max Door Gap	7mm if surface mounted & 4mm if rebated
Min Door Gap	5mm if surface mounted & 2mm if rebated
Material	Aluminium & Silicone
Warranty	2 years from date of sale

CATEGORIES

Door Seals / Perimeter Seals

Door Seals / Meeting Style (Astragal) Seals

Contact

Customer Service: 1800 555 600

Locksmith Services: 1800 555 700

Email: online@accesshardware.com.au

Website: www.accesshardware.com.au

Disclaimer

The specifications on our website are often provided to us by our manufacturers, provided as guidance only. While Access ensures it deals with reputable manufacturers, it cannot verify the accuracy of every claim made by them about their products as manufacturers often reserve the right to make changes without notice. To the extent permitted by law, We are not liable in respect of any claims made on this website in respect of any specification or claim by a manufacturer for its product.