


## Kilargo IS7095si Perimeter Seal

[Click here to view on website](#)



SKU	Length
LO-IS7095SI-1000CA	1000mm
LO-IS7095SI-2250CA	2250mm
LO-IS7095SI-SDS-CA	Single Door Set (1 x 1000mm, 1 x 2100mm)
LO-IS7095SI-LSDS-CA	Long Single Door Set (1 x 1000mm, 2 x 2750mm)
LO-IS7095SI-DDS-CA	Double Door Set (3 x 2100mm)
LO-IS7095SI-LDDS-CA	Long Double Door Set ( 1 x 2100mm, 2 x 2750mm)
LO-IS7095SI-2500CA	2500mm

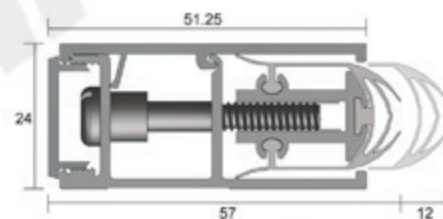

### DESCRIPTION

The IS7095si heavy duty, adjustable perimeter seal is designed for high performance acoustic applications. This seal can be fitted to the head and jambs of door frame perimeters in lieu of door stops, where frames are non fire-rated. This seal can achieve up to 12mm sealing adjustment once the seal has been fitted, for maximum sound control. Fixing screws are concealed behind the aesthetic tamper-proof aluminium cover plate.

#### Gap Size

- Min. 0mm / Max. 12mm

#### Standard Lengths

- 1000mm
- 2250mm
- 2500mm
- Also available in: 250mm increments from 1000mm to 5000mm (Special Order Only)
- Single Door Set (1 x 1000mm, 2 x 2100mm)
- Long Single Door Set (1 x 1000mm, 2 x 2750mm)
- Double Door Set (3 x 2100mm)
- Long Double Door Set (1 x 2100mm, 2 x 2750mm)

#### Standard Finishes

- Silver anodised aluminium with grey silicone gasket and grey PVC rigid cover strip
- (Black silicone gasket and cover strip also available upon request)

#### Fixing


- When fixing the IS7095si seal to rebated frames of single doors, specify a long back set door latch

#### Approvals

- Fire tested to AS1530 Part 4 in accordance with AS1905 Part 1
- Medium temperature smoke leakage approvals to AS1530 Part 7 available on proprietary door assemblies
- Acoustically tested in accordance with AS1191, ISO140.3 & ISO10140-2
- Durability tests demonstrating over 100,000 open & close cycles and close cycles

### SPECIFICATION

Colour	Silver
Includes Fixing Screws	Yes

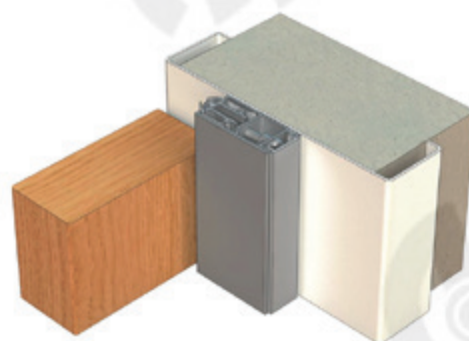

## Contact

**Customer Service:** 1800 555 600  
**Locksmith Services:** 1800 555 700  
**Email:** [online@accesshardware.com.au](mailto:online@accesshardware.com.au)  
**Website:** [www.accesshardware.com.au](http://www.accesshardware.com.au)

## Disclaimer

*The specifications on our website are often provided to us by our manufacturers, provided as guidance only. While Access ensures it deals with reputable manufacturers, it cannot verify the accuracy of every claim made by them about their products as manufacturers often reserve the right to make changes without notice. To the extent permitted by law, We are not liable in respect of any claims made on this website in respect of any specification or claim by a manufacturer for its product.*

Suitable for Smoke Doors	Medium temperature smoke leakage tests to AS1530 Part 7 available on proprietary door assemblies. Conforms with NCC Specification C3.4 smoke sealing requirements.
Fire tested, check with manufacturer for further details.	Fire tested to AS1530 Part 4 in accordance with AS1905 Part 1
Acoustic Rating to AS1191 and ISO140.3	Acoustically tested in accordance with AS1191, ISO140.3 & ISO10140-2
Finish	Silver anodised aluminium carrier with grey silicone gasket and cover strip
Max Door Gap	12mm
Material	Aluminium & Silicone
Min Door Gap	0mm
Warranty	2 years from date of sale

## CATEGORIES

Door Seals / Perimeter Seals

## Contact

**Customer Service:** 1800 555 600  
**Locksmith Services:** 1800 555 700  
**Email:** [online@accesshardware.com.au](mailto:online@accesshardware.com.au)  
**Website:** [www.accesshardware.com.au](http://www.accesshardware.com.au)

## Disclaimer

*The specifications on our website are often provided to us by our manufacturers, provided as guidance only. While Access ensures it deals with reputable manufacturers, it cannot verify the accuracy of every claim made by them about their products as manufacturers often reserve the right to make changes without notice. To the extent permitted by law, We are not liable in respect of any claims made on this website in respect of any specification or claim by a manufacturer for its product.*