


Kilargo IS7195si Perimeter Seal

[Click here to view on website](#)



SKU	Length
LO-IS7195SI-1000CA	1000mm
LO-IS7195SI-2250CA	2250mm
LO-IS7195SI-SDS-CA	Single Door Set (1 x 1000mm, 1 x 2100mm)
LO-IS7195SI-LSDS-CA	Long Single Door Set (1 x 1000mm, 2 x 2750mm)
LO-IS7195SI-DDS-CA	Double Door Set (3 x 2100mm)
LO-IS7195SI-LDDS-CA	Long Double Door Set (1 x 2100mm, 2 x 2750mm)

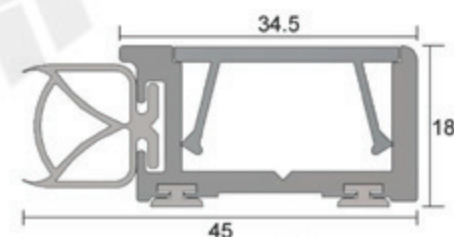

DESCRIPTION

The IS7195si perimeter seal is also designed for high performance acoustic applications and is fitted to the head and jambs of door perimeters (with or without door stops) on steel or timber frames. It's an ideal seal for heavy traffic areas such as hospitals, schools, prisons and TAFES, etc. An anodised aluminium cover "strip" simply "presses" onto the main carrier to conceal fixings. Once fitted, the space behind this cover plate can be utilised for low voltage cable management. The IS7195si has been successfully tested on proprietary fire door assemblies (mounted on a 25mm frame stop).

Gap Size

- Min. 0mm / Max. 15mm

Standard Lengths

- 1000mm
- 2250mm
- Also available in: 250mm increments from 1000mm to 5000mm (Special Order Only)
- Single Door Set (1 x 1000mm, 2 x 2100mm)
- Long Single Door Set (1 x 1000mm, 2 x 2750mm)
- Double Door Set (3 x 2100mm)
- Long Double Door Set (1 x 2100mm, 2 x 2750mm)

Standard Finishes


- Silver anodised aluminium with grey silicone gasket
- (Black silicone gasket also available upon request)

Fixing

- When fixing the IS7195si seal to rebated frames of single doors, specify a long back set door latch

Approvals

- Fire tested to AS1530 Part 4 in accordance with AS1905 Part 1
- Medium temperature smoke leakage approvals to AS1530 Part 7 available on proprietary door assemblies
- Acoustically tested in accordance with AS1191, ISO140.3 and ISO10140-2
- Durability tests demonstrating over 100,000 open & close cycles

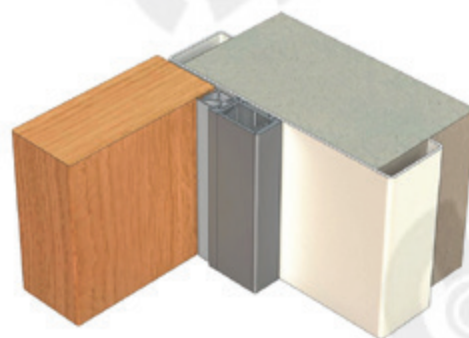

SPECIFICATION

Colour	Silver
Includes Fixing Screws	Yes

Contact

Customer Service: 1800 555 600
Locksmith Services: 1800 555 700
Email: online@accesshardware.com.au
Website: www.accesshardware.com.au

Disclaimer

The specifications on our website are often provided to us by our manufacturers, provided as guidance only. While Access ensures it deals with reputable manufacturers, it cannot verify the accuracy of every claim made by them about their products as manufacturers often reserve the right to make changes without notice. To the extent permitted by law, We are not liable in respect of any claims made on this website in respect of any specification or claim by a manufacturer for its product.

Suitable for Smoke Doors	Medium temperature smoke leakage tests to AS1530 Part 7 available on proprietary door assemblies. Conforms with NCC Specification C3.4 smoke sealing requirements.
Fire tested, check with manufacturer for further details.	Fire tested to AS1530 Part 4 in accordance with AS1905 Part 1
Max Door Gap	15mm
Acoustic Rating to AS1191 and ISO140.3	Acoustically tested in accordance with AS1191, ISO140.3 & ISO10140-2
Finish	Silver anodised aluminium carrier with grey siliconegasket and cover strip
Material	Aluminium & Silicone
Min Door Gap	0mm
Warranty	2 years from date of sale

CATEGORIES

Door Seals / Perimeter Seals

Contact

Customer Service: 1800 555 600
Locksmith Services: 1800 555 700
Email: online@accesshardware.com.au
Website: www.accesshardware.com.au

Disclaimer

The specifications on our website are often provided to us by our manufacturers, provided as guidance only. While Access ensures it deals with reputable manufacturers, it cannot verify the accuracy of every claim made by them about their products as manufacturers often reserve the right to make changes without notice. To the extent permitted by law, We are not liable in respect of any claims made on this website in respect of any specification or claim by a manufacturer for its product.