


Raven RP23 Perimeter Seal

[Click here to view on website](#)



| SKU | Length |
|---------------|---|
| RP23-2250CA | 2250mm |
| RP23-3000CA | 3000mm |
| RP23SDS-S-CA | Single Door Set (1 x 1000mm, 2 x 2100mm) |
| RP23SDS-L-CA | Long Single Door Set (1 x 1000mm, 2 x 2750mm) |
| RP23DDS-S-CA | Double Door Set (3 x 2100mm) |
| RP23-DDS-L-CA | Long Double Door Set (1 x 2000mm, 2 x 2750mm) |

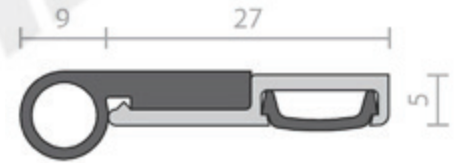

DESCRIPTION

A S.E. EPDM compression seal ideal for smoke and weather applications on butt hinged doors. Can be mitred or butt jointed for a neat finish. Its aluminium carrier is sturdy and slotted for adjustment with concealed fixings. It is quick and easy to install on door stops around the jamb and head and can be fitted without removing the door.

Can be used on all four sides of the door to form a bulk head seal.

Note: A built up sill similar in profile to the stops will be required for bulkhead applications.

Location: Head and jambs of single and double butt hinged doors or bulk head applications.

Min/Max Gap: 0mm to 7mm.

Finish: Satin clear (silver), bronze anodised aluminium (15Åµm) or paint at extra cost.

Fixing: Screw fix. Zinc plated, cross recess head S.T. screws and cover strip supplied.

Seal: RP323. Black EPDM (SE).

Sizes: Available in door set sizes or stock lengths.



Approvals

Acoustic AUS/NZ: NCC Spec. F5.5.

UK/EU: Approved Document E. Rated to BS EN ISO 717.1.

Fire AUS/NZ: NCC Spec. C3.4. AS1530.4 & AS/NZS 1905.1. NZ BC Compliance Doc. C/AS1 6.19.2 & App. C6.1.1.

UK/EU: Tests above are similar to BS EN 1634-1, BS 476 Pt. 20 & 22.

FRL & FRR-/240/60 and FD240.Fire Approved

Smoke NCC Spec. C3.4. AS1530.7 & BS EN 1634-3. Meets smoke leakage rates specified in AS6905 & EN 13501-2

Energy NCC Pt. 3.12.3.3 & J3.4.

SPECIFICATION

| | |
|---|--|
| Fire tested, check with manufacturer for further details. | Yes |
| Material | Aluminium |
| Includes Fixing Screws | Yes |
| Warranty | 2 Years |
| Accoustic Rating to AS1191 and ISO140.3 | Acoustically tested in accordance with AS1191, ISO140.3 & ISO10140-2 |

Contact

Customer Service: 1800 555 600

Locksmith Services: 1800 555 700

Email: online@accesshardware.com.au

Website: www.accesshardware.com.au

Disclaimer

The specifications on our website are often provided to us by our manufacturers, provided as guidance only. While Access ensures it deals with reputable manufacturers, it cannot verify the accuracy of every claim made by them about their products as manufacturers often reserve the right to make changes without notice. To the extent permitted by law, We are not liable in respect of any claims made on this website in respect of any specification or claim by a manufacturer for its product.

| | |
|--------------------------|---|
| Finish | Various |
| Colour | Various |
| Suitable for Smoke Doors | Conforms to NCC Specification C3.4 smoke sealing requirements |
| Max Door Gap | 7mm |
| Min Door Gap | 0mm |

CATEGORIES

Door Seals / Perimeter Seals

Contact

Customer Service: 1800 555 600

Locksmith Services: 1800 555 700

Email: online@accesshardware.com.au

Website: www.accesshardware.com.au

Disclaimer

The specifications on our website are often provided to us by our manufacturers, provided as guidance only. While Access ensures it deals with reputable manufacturers, it cannot verify the accuracy of every claim made by them about their products as manufacturers often reserve the right to make changes without notice. To the extent permitted by law, We are not liable in respect of any claims made on this website in respect of any specification or claim by a manufacturer for its product.