


## Raven RP47Si Perimeter Seal

[Click here to view on website](#)



SKU	Length
RP47SI-1000CA	1000mm
RP47SI-2250CA	2250mm
RP47SI-2500CA	2500mm
RP47SI-2750CA	2750mm
RP47SI-3000CA	3000mm
RP47SI-SDS-S-CA	Single Door Set (1 x 1000mm, 2 x 2100mm)
RP47SI-SDS-L-CA	Long Single Door Set (1 x 1000mm, 2 x 2750mm)
RP47SI-DDS-S-CA	Double Door Set (3 x 2100mm)
RP47SI-DDS-L-CA	Long Double Door Set (1 x 2000mm, 2 x 2750mm)

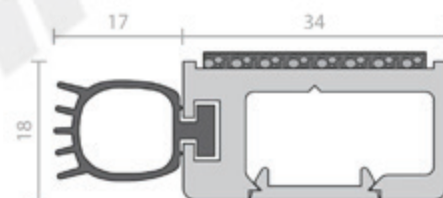

### DESCRIPTION

A heavy duty seal designed to replace the conventional door stop. The RP47Si is ideal for medium temperature smoke / fire door applications and has excellent acoustic qualities for heavy traffic areas. With concealed fixings and adjustable fastener slots to achieve an optimum seal, a space for low voltage cable management can be found behind a tamper proof cover strip. RP47Si can be mitred or butt jointed for a neat installation. Can be used on all four sides of the door to form a bulk head seal.

Note: If fixing to rebated frames of single doors, specify a long backset door latch.

Location: Head and jambs of single and double butt hinged doors or bulk head applications.

Min/Max Gap: 0mm to 17mm.

Finish: Satin clear (silver) STANDARD, (black anodised aluminium (15µm) or paint at extra cost SPECIAL ORDER).

Fixing: Concealed screw fix. Zinc plated, Tek self drilling screws (metal) supplied.

Seal: RP347Si. Black silicon rubber (SE).

Sizes: Available in door set sizes or stock lengths.

### Approvals

UL Cert. GVI.R37913.

Acoustic AUS/NZ: NCC Spec. F5.5.

UK/EU: Approved Document E. Rated to BS EN ISO 717.1.

Fire AUS/NZ: NCC Spec. C3.4. NZ BC Compliance Doc C/AS1 6.19.2 & App C6.1.1.

UK/EU: Approved Document B. BE EN 1634-1.

FRL & FRR-/240/30. Fire Approved To be used on door frames with a 25mm stop.

Gasket flammability index 1 when tested to AS1530.2.

Smoke NCC Spec. C3.4. AS1530.7 & BS EN 1634-3. Meets smoke leakage rates specified in AS6905 & EN 13501-2.

Energy NCC Pt. 3.12.3.3 & J3.4.



### SPECIFICATION

## Contact

**Customer Service:** 1800 555 600

**Locksmith Services:** 1800 555 700

**Email:** [online@accesshardware.com.au](mailto:online@accesshardware.com.au)

**Website:** [www.accesshardware.com.au](http://www.accesshardware.com.au)

## Disclaimer

The specifications on our website are often provided to us by our manufacturers, provided as guidance only. While Access ensures it deals with reputable manufacturers, it cannot verify the accuracy of every claim made by them about their products as manufacturers often reserve the right to make changes without notice. To the extent permitted by law, We are not liable in respect of any claims made on this website in respect of any specification or claim by a manufacturer for its product.

Fire tested, check with manufacturer for further details.	Yes
Material	Aluminium
Includes Fixing Screws	Yes
Warranty	2 Years
Max Door Gap	10mm
Acoustic Rating to AS1191 and ISO140.3	Acoustically tested in accordance with AS1191, ISO140.3 & ISO10140-2
Finish	Various
Colour	Various
Suitable for Smoke Doors	NA
Min Door Gap	0mm

## CATEGORIES

Door Seals / Perimeter Seals

## Contact

**Customer Service:** 1800 555 600  
**Locksmith Services:** 1800 555 700  
**Email:** [online@accesshardware.com.au](mailto:online@accesshardware.com.au)  
**Website:** [www.accesshardware.com.au](http://www.accesshardware.com.au)

## Disclaimer

*The specifications on our website are often provided to us by our manufacturers, provided as guidance only. While Access ensures it deals with reputable manufacturers, it cannot verify the accuracy of every claim made by them about their products as manufacturers often reserve the right to make changes without notice. To the extent permitted by law, We are not liable in respect of any claims made on this website in respect of any specification or claim by a manufacturer for its product.*