

## Raven RP70 Automatic Door Bottom Seal

[Click here to view on website](#)



SKU	Length
RP70-450CA	450mm (Cuts back to 300mm)
RP70-610CA	610mm (Cuts back to 450mm)
RP70-920CA	920mm (Cuts back to 610mm)
RP70-1067CA	1067mm (Cuts back to 920mm)
RP70-1220CA	1220mm (Cuts back to 1067mm)
RP70-1500CA	1500mm (Cuts back to 1220mm)

### DESCRIPTION

A heavy duty, fully morticed, automatic door bottom seal that is spring loaded to lift clear of the floor when the door is opened. It is self levelling and reversible for left and right handed operation. Acoustically designed, featuring an EPDM foam gasket for acoustic door applications. RP70 is operated automatically by pressure against the door jamb on its adjustable brass strike.

Location: Fully morticed into the bottom of single and double butt hinged doors (minimum door thickness of 45mm). For double doors, plain meeting stiles are required.

Min/Max Gap: 3mm to 13mm.

Finish: Satin clear (silver) anodised aluminium (15Åµm).

Fixing: Screw fix. Colour matched escutcheon plates and zinc plated, cross recess head S.T. screws supplied.

Seal:RP338. Black EPDM sponge (SE).

Sizes: 1500mm, 1220mm, 1070mm, 920mm, 610mm, 450mm to 300mm(min). Seals cut back to exact size.

### Approvals

Acoustic AUS/NZ: NCC Spec. F5.5.

UK/EU: Approved Document E. Rated to BS EN ISO 717.1.

Fire AUS/NZ: NCC Spec. C3.4. AS1530.4 & AS/NZS 1905.1.

UK/EU: Approved Document B. BS 476 Pt. 20 & 22 (similar to BS EN 1634-1).

FRL & FRR-/240/30 and FD240.Fire Approved


Energy NCC Pt. 3.12.3.3 & J3.4.

Design for Access and Mobility High efficiency mechanism to assist with the closing force requirements detailed in AS1428.1.

Durability Tested to over 1,000,000 operating cycles without failure.

### SPECIFICATION

Fire tested, check with manufacturer for further details.	Yes
Accoustic Rating to AS1191 and ISO140.3	Yes
Material	Aluminium
Includes Fixing Screws	Yes
Warranty	2 Years
Min Door Gap	3mm

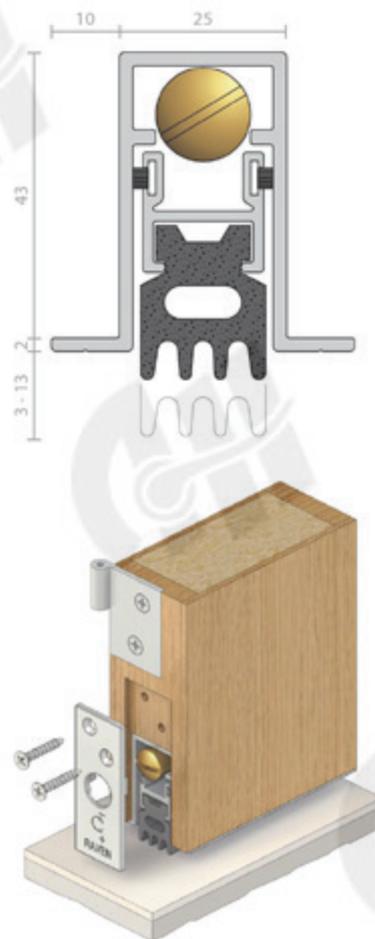

## Contact

**Customer Service:** 1800 555 600

**Locksmith Services:** 1800 555 700

**Email:** [online@accesshardware.com.au](mailto:online@accesshardware.com.au)

**Website:** [www.accesshardware.com.au](http://www.accesshardware.com.au)

## Disclaimer

The specifications on our website are often provided to us by our manufacturers, provided as guidance only. While Access ensures it deals with reputable manufacturers, it cannot verify the accuracy of every claim made by them about their products as manufacturers often reserve the right to make changes without notice. To the extent permitted by law, We are not liable in respect of any claims made on this website in respect of any specification or claim by a manufacturer for its product.

Rebated	Fully morticed into the bottom edge of single action doors.
Finish	Various
Suitable for Smoke Doors	NA
Max Door Gap	13mm

## CATEGORIES

Door Seals / Door Bottom Seals / Automatic Door Bottom Seals

---

## Contact

**Customer Service:** 1800 555 600  
**Locksmith Services:** 1800 555 700  
**Email:** [online@accesshardware.com.au](mailto:online@accesshardware.com.au)  
**Website:** [www.accesshardware.com.au](http://www.accesshardware.com.au)

## Disclaimer

*The specifications on our website are often provided to us by our manufacturers, provided as guidance only. While Access ensures it deals with reputable manufacturers, it cannot verify the accuracy of every claim made by them about their products as manufacturers often reserve the right to make changes without notice. To the extent permitted by law, We are not liable in respect of any claims made on this website in respect of any specification or claim by a manufacturer for its product.*