

Raven RP92Si Automatic Door Bottom Seal

[Click here to view on website](#)



SKU	Length
RP92-820CA	820mm (Cuts back to 600mm)
RP92SI-920CA	920mm (Cuts back to 820mm)
RP92SI-1070CA	1070mm (Cuts back to 920mm)
RP92-1220CA	1200MM (Cuts back to 1070mm)

DESCRIPTION

A heavy duty, adjustable, automatic door bottom seal that is spring loaded to lift clear of the floor when the door is opened. Ideal for butt hinged doors with large gaps such as where internal access ramps are used and large clearances are necessary. The RP92Si can accommodate ramped floors/sills with gradients up to 1:8 and utilises an aesthetic extruded aluminium cover for concealed fixing.

Location: Face mounted on the bottom of timber or metal single and double butt hinged doors.

Min/Max Gap: 25mm to 55mm. Larger gaps can be accommodated if set lower on the door bottom and smaller gaps if set higher on the door bottom (user determined).

Finish: Satin clear (silver) anodised aluminium (15Åµm) with black anodised inner.

Fixing: Concealed screw fix. Adhesive striker plate, escutcheon plates and zinc plated, cross recess head S.T. screws supplied.

Seal: RP347Si. Black Silicon Rubber (SE).

Sizes: 1200mm, 1070mm, 920mm, 820mm to 600mm(min). Seals cut back to exact size.

Approvals

Access & Mobility AUS/NZ: NCC D3, D3.2. Designed with high efficiency mechanism to assist with the closing force requirements detailed in AS1428.1.

UK/EU: Approved Document M.

Fire Gasket flammability index 1 when tested to AS1530.2.

Smoke AUS/NZ: NCC Spec. C3.4. NZ BC Compliance Doc. C/AS1 6.19.2(b).

UK/EU: Approved Document B.

Energy NCC Pt. 3.12.3.3 & J3.4.

Durability Tested to over 1,000,000 operating cycles without failure.

Patented.

SPECIFICATION


Fire tested, check with manufacturer No for further details.

Acoustic Rating to AS1191 and ISO140.3 Yes

Material Aluminium

Includes Fixing Screws Yes

Warranty 2 Years

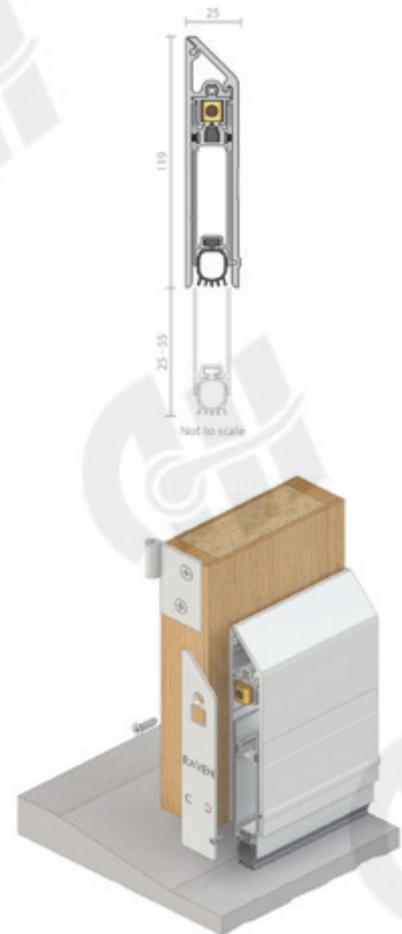

Contact

Customer Service: 1800 555 600

Locksmith Services: 1800 555 700

Email: online@accesshardware.com.au

Website: www.accesshardware.com.au

Disclaimer

The specifications on our website are often provided to us by our manufacturers, provided as guidance only. While Access ensures it deals with reputable manufacturers, it cannot verify the accuracy of every claim made by them about their products as manufacturers often reserve the right to make changes without notice. To the extent permitted by law, We are not liable in respect of any claims made on this website in respect of any specification or claim by a manufacturer for its product.

Suitable for Smoke Doors	Medium temperature smoke leakage tests to AS1530 Part 7 available on proprietary door assemblies. Conforms with NCC Specification C3.4 smoke sealing requirements.
Rebated	No
Finish	Various
Max Door Gap	55mm
Min Door Gap	25mm

CATEGORIES

Door Seals / Door Bottom Seals / Automatic Door Bottom Seals

Contact

Customer Service: 1800 555 600
Locksmith Services: 1800 555 700
Email: online@accesshardware.com.au
Website: www.accesshardware.com.au

Disclaimer

The specifications on our website are often provided to us by our manufacturers, provided as guidance only. While Access ensures it deals with reputable manufacturers, it cannot verify the accuracy of every claim made by them about their products as manufacturers often reserve the right to make changes without notice. To the extent permitted by law, We are not liable in respect of any claims made on this website in respect of any specification or claim by a manufacturer for its product.