


Raven RP94Si Perimeter Seal

[Click here to view on website](#)



SKU	Length
RP94SI-1000CA	1000mm
RP94SI-2250CA	2250mm
RP94SI-3000CA	3000mm
RP94SI-SDS-S-CA	Single Door Set (1 x 1000mm, 2 x 2100mm)
RP94SI-SDS-L-CA	Long Single Door Set (1 x 1000mm, 2 x 2750mm)
RP94SI-DDS-S-CA	Double Door Set (3 x 2100mm)
RP94SI-DDS-L-CA	Long Double Door Set (1 x 2000mm, 2 x 2750mm)

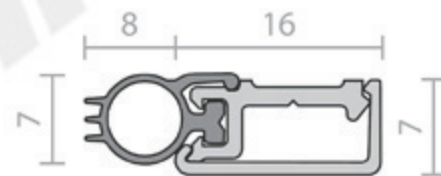

DESCRIPTION

A weather and acoustic seal, suitable for rebated frames. RP94Si is quick and easy to install, either mitred or butt jointed to the head and jambs without removing the door. Slotted for installation adjustment, the soft silicon bulb accommodates a tighter seal and with a tamper proof cover strip, provides a fit and forget feature.

Can be used in conjunction with Raven door bottom seals, astragals and threshold plates.

The tamper proof aluminium cover strip is not recommended for removal once installed. Refer to RP10Si or RP78Si for this feature.

Location: Head and jambs of single and double butt hinged doors.

Min/Max Gap: 0mm to 6mm.

Finish: Satin clear (silver), black anodised aluminium (15µm) or paint at extra cost (cover strip only).

Fixing: Screw fix. Zinc plated, cross recess head S.T. screws and cover strip supplied.

Seal: RP394Si. Grey silicon rubber (SE).

Sizes: Available in door set sizes or stock lengths.

Approvals

UL Cert. GVI1.R37913.

Acoustic AUS/NZ: NCC Spec. F5.5.

UK/EU: Approved Document E. Rated to BS EN ISO 717.1.

Fire AUS/NZ: NCC Spec. C3.4. AS1530.4 & AS/NZS 1905.1. NZ BC Compliance Doc. C/AS1 6.19.2 & App. C6.1.1.

UK/EU: Approved Document B. BS 476 Pt. 20 & 22 (similar to BS EN 1634-1).

FRL & FRR-/240/30 and FD240.Fire Approved

Gasket flammability index 1 when tested to AS1530.2.

Smoke NCC Spec. C3.4. AS1530.7 & BS EN 1634-3. Meets smoke leakage rates specified in AS6905 & EN 13501-2.

Energy NCC Pt. 3.12.3.3 & J3.4.



SPECIFICATION

Fire tested, check with manufacturer for further details. Yes

Contact

Customer Service: 1800 555 600

Locksmith Services: 1800 555 700

Email: online@accesshardware.com.au

Website: www.accesshardware.com.au

Disclaimer

The specifications on our website are often provided to us by our manufacturers, provided as guidance only. While Access ensures it deals with reputable manufacturers, it cannot verify the accuracy of every claim made by them about their products as manufacturers often reserve the right to make changes without notice. To the extent permitted by law, We are not liable in respect of any claims made on this website in respect of any specification or claim by a manufacturer for its product.

Material	Aluminium
Includes Fixing Screws	Yes
Warranty	2 Years
Accoustic Rating to AS1191 and ISO140.3	Acoustically tested in accordance with AS1191, ISO140.3 & ISO10140-2
Finish	Various
Colour	Various
Suitable for Smoke Doors	Conforms to NCC Specification C3.4 smoke sealing requirements
Max Door Gap	6mm
Min Door Gap	0mm

CATEGORIES

Door Seals / Perimeter Seals

Contact

Customer Service: 1800 555 600
Locksmith Services: 1800 555 700
Email: online@accesshardware.com.au
Website: www.accesshardware.com.au

Disclaimer

The specifications on our website are often provided to us by our manufacturers, provided as guidance only. While Access ensures it deals with reputable manufacturers, it cannot verify the accuracy of every claim made by them about their products as manufacturers often reserve the right to make changes without notice. To the extent permitted by law, We are not liable in respect of any claims made on this website in respect of any specification or claim by a manufacturer for its product.