

RP129Si



A heavy duty medium temperature smoke and weather door bottom seal. The RP129Si can be checked out or drilled to accommodate pivot hardware whilst still providing a continuous seal.

Use in conjunction with RP130Si and a Raven threshold plate (essential).

Location: Bottom of double butt hinged or centre pivot double acting doors.

Min/Max Gap: 14mm to 18mm.

Finish: Satin clear (silver) anodised aluminium (15µm) or paint at extra cost.

Fixing: Screw fix. Zinc plated, cross recess head S.T. screws supplied.

Seal: RP3129Si. Light grey silicon rubber (SE).

Sizes: Available in stock lengths.

Approvals

Fire Gasket flammability index 1 when tested to AS1530.2.



Smoke NCC Spec. C3.4. NZ BC Compliance Doc. C/AS1 6.19.2(b). AS1530.7 & BS EN 1634-3 (similar to BS 476 section 31.1). Meets smoke leakage rates specified in AS6905 & EN 13501-2 "Sa", "Sm".

Energy NCC Pt. 3.12.3.3 & J3.4.

Durability Tested to over 1,000,000 operating cycles without failure.


Insects/Vermin AS4674, 2.1.5(iv), 2.1.7.

Registered Design.

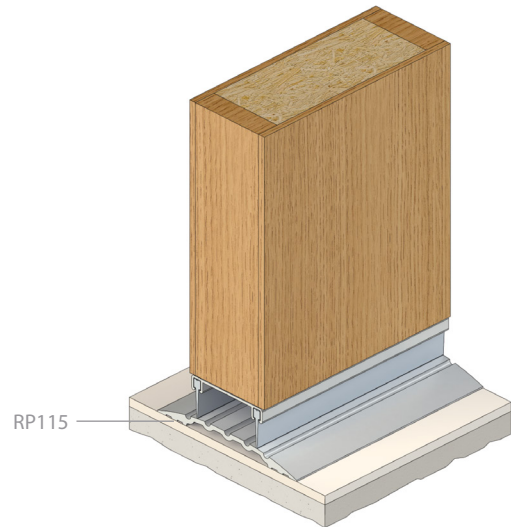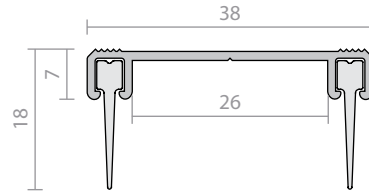


Brush Strip Seals


RP2, RP2b (brush only) p.109




RP2a p.110




RP2b p.110




RP15 p.111




RP41 p.111



RP49, RP50 p.112




RP51F p.112



RP52F p.113



RP57, RP58 p.113



RP74 p.114



RP74F p.114



RP75 p.115

