



TS 68

Door closer

The ideal low-cost solution for standard doors

With the TS 68, dormakaba has developed a low-cost door closer which can be universally used on all common door types. It is particularly quick and easy to install – and does not require a mounting backplate.

The closer arm's power shoe and changes in templating allow easy selection of closing force to suit various door sizes.

Certified to ISO 9001

Benefits

For the trade

- The low cost solution for standard doors.
- Just one model for all mounting positions.

For the installer/fabricator

- Non-handed unit.
- Quick and easy to install.
- Fixes perfectly to all door types without the need for a mounting backplate.

For the architect/specifier


- Compact design.
- Inexpensive, proven reliability.

For the user

- Two valves for optimum closing speed and reliable latching action.

Data and features		TS 68
Selectable closing force (variable via arm power shoe and templating)	Size	EN 2/3/4
Door width	≤ 1100 mm	●
External doors, outward opening		●
Non-handed		●
Arm	Standard	●
	Slide channel	–
Closing speed adjustable via 2 separate valves	180° – 15° 15° – 0°	●
Backcheck		○
Delayed action		–
Hold-open		○
Weight in kg		1.4
Dimensions in mm	Length	220
	Overall	45
	Depth	43.5
	Height	43.5
Approved to AS1905 Part 1 Fire Resistant Doors (Backcheck model only)		●



● yes – no ○ option

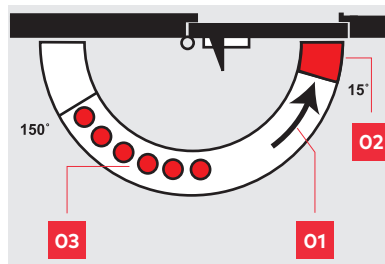

- 01** Adjustable closing speed in the range 180° – 15°
- 02** Adjustable closing speed in the range 15° – 0°
- 03** Hold-open range with hold-open arm model (optional extra).


Door width	Size setting
≤ 850 mm	EN 2
≤ 950 mm	EN 3
≤ 1100 mm	EN 4

The TS 68's size setting is selected for the door width by moving the closer body and/or turning the arm power shoe.

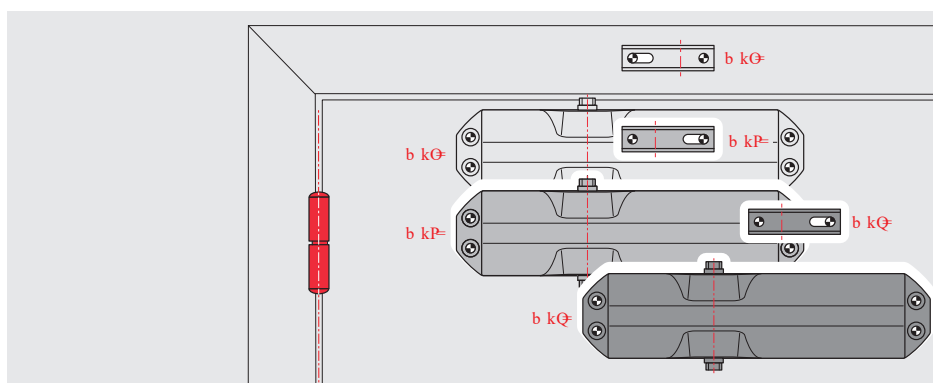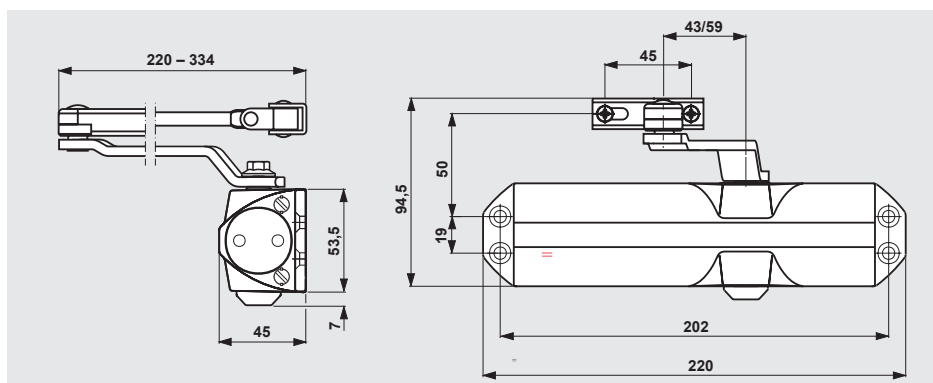


Door leaf fixing, pull-side

	EN 2	EN 3	EN 4
A	170	170	250
B	59	43	43
C	96	96	176
D	198.5	198.5	278.5
E	87	87	167

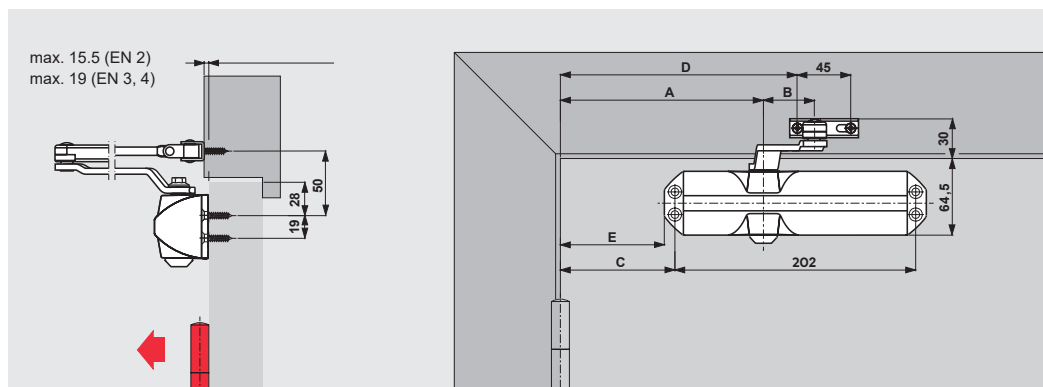

Frame fixing, push side


	EN 2	EN 3	EN 4
A	170	170	250
B	59	43	43
C	96	96	176
D	198.5	198.5	278.5
E	87	87	167

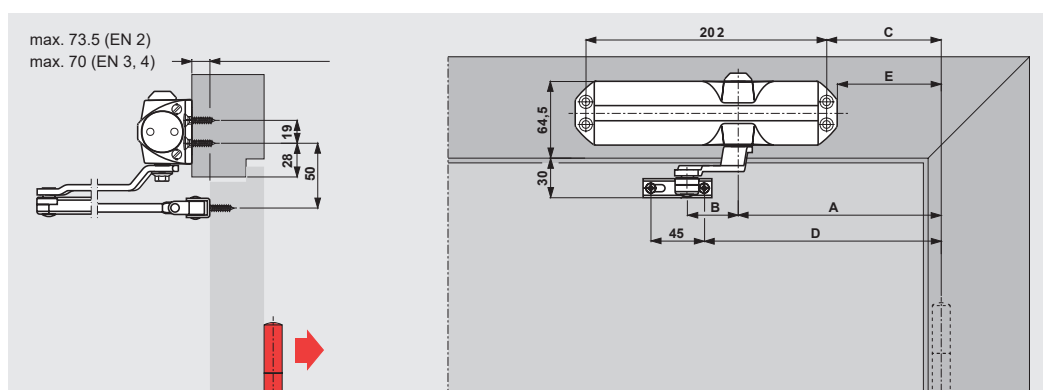

Parallel arm fixing push side

EN 2

(door width max. 850 mm)

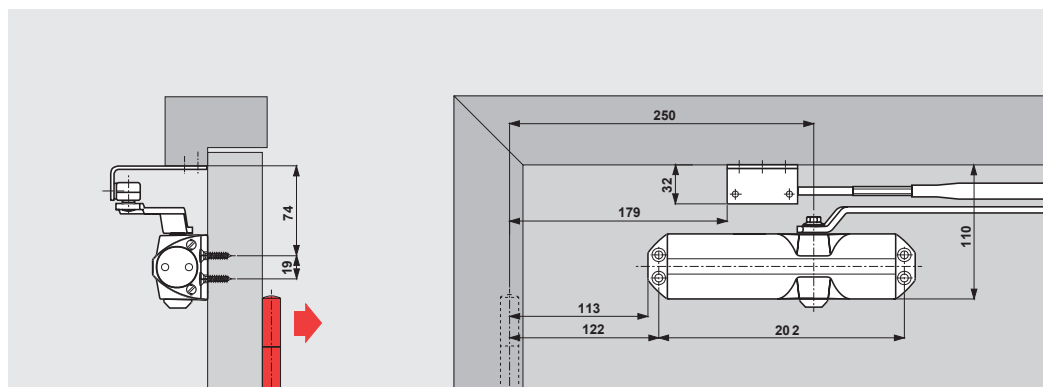

Standard equipment

Order No.

■ = Closer body and arm

▲ = Accessory

Colour

Silver
Brass
Dark brown
White




xx

01

02

03

11

Closer body TS 68	Standard arm	Hold-open arm	Parallel arm bracket
			
Size EN 2 / 3 / 4	■ 664105xxBC	■ 664008xx	▲ 660005xx
	■ 664005xxNBC		

Specification text TS68 EN 2/3/4

Rack and pinion door closer with selectable closing force, size EN 2, 3 and 4 and adjustable closing speed in two independent ranges. Non-handed.



**Door
Hardware**



**Entrance
Systems**



**Electronic
Access & Data**



**Interior Glass
Systems**



**Lodging
Systems**



**Mechanical
Key Systems**



Safe Locks



Services

dormakaba Australia

Head Office
12-13 Dansu Court
Hallam VIC 3803
T 1800 675 411
info.au@dormakaba.com
www.dormakaba.com.au

dormakaba New Zealand

Head Office
Building P, 61-69 Patiki Road
Avondale, Auckland 1026
T: 0800 436 762
info.nz@dormakaba.com
www.dormakaba.co.nz