

# SABRE<sup>®</sup>

## ARCHITECTURAL

# 770 DOOR CLOSER

SUITABLE FOR TIMBER, METAL  
AND ALUMINIUM DOORS

- Size 2/3/4 position adjustable
- Suits door widths from 850mm to 1100mm
- Door weight 40kg to 80kg
- 180° opening
- Non handed
- Adjustable back check
- Parallel arm bracket (optional extra)
- Track arm application available



**Fire Rated**



accesshardware BUSINESS REWARDS



Your business can earn  
Qantas Points with us\*.

\*Find out more by calling Access Hardware customer service on 1800 555 600 or visit [accesshardware.com.au](http://accesshardware.com.au). T&Cs apply.  
[qantasbusinessrewards.com/terms](http://qantasbusinessrewards.com/terms) and [accesshardware.com.au/qbr](http://accesshardware.com.au/qbr)

# 770 DOOR CLOSER

## APPLICATIONS

The 770 Door Closer was designed for the budget conscious in mind. Non handed and easy to install the 770 Door Closer includes features such as adjustable back check, latching and closing speeds. Parallel arm applications are possible with the addition of the parallel arm bracket


which is available separately.

**Standard Finishes:** SIL = Silver, SSS = Satin Stainless Steel, PSS = Polished Stainless Steel

## STANDARD ARM

### PULL SIDE


Provided the site conditions allow, an opening angle of 180° is possible with this installation. Please note that using measurements A or B will provide different spring strengths.

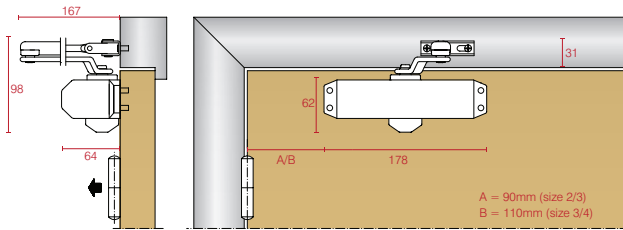

## TRACK ARM

### PULL SIDE


Provided the site conditions allow, an opening angle of 160° is possible with this installation. Please note that using this installation a size 3 spring strength is achieved.

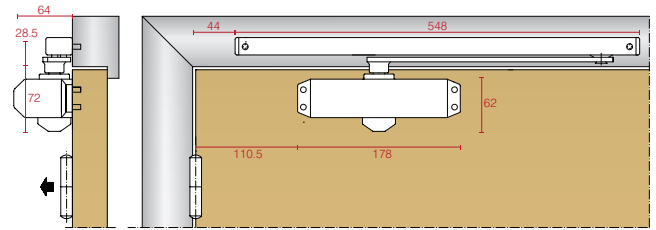

## STANDARD TRANSOM

### PULL SIDE


Provided the site conditions allow, an opening angle of 180° is possible with this installation. Please note that using measurements A or B will provide different spring strengths.

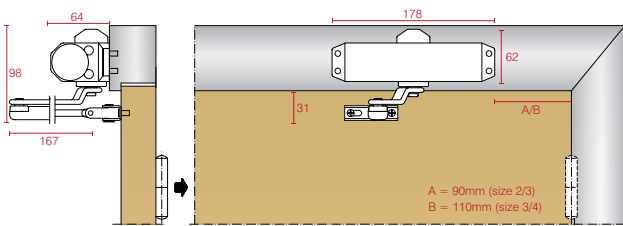

## TRACK ARM TRANSOM

### PULL SIDE


Provided the site conditions allow, an opening angle of 160° is possible with this installation. Please note that using this installation a size 3 spring strength is achieved.

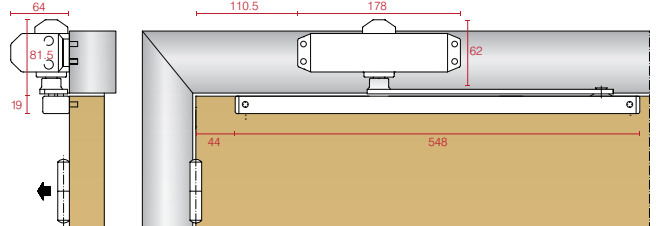

## PARALLEL ARM

### PUSH SIDE


Provided the site conditions allow, an opening angle of 180° is possible with this installation. Please note that using this installation a size 3 spring strength is achieved.

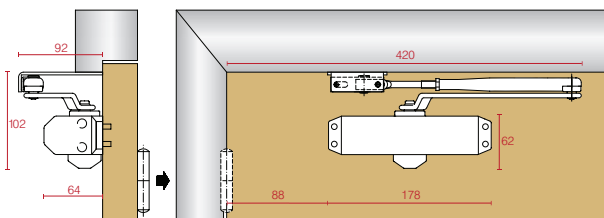

## TRACK ARM

### PUSH SIDE

Provided the site conditions allow, an opening angle of 120° is possible with this installation. Please note that using this installation a size 3 spring strength is achieved.

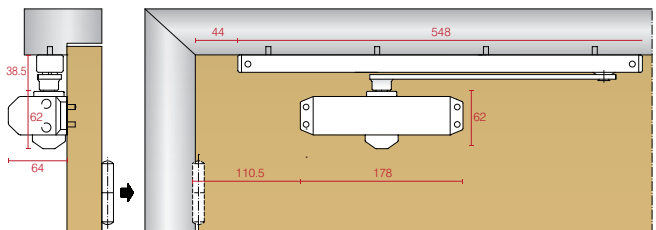

## ACCESSORIES



SAB-DC770-COV-SIL  
Cover - 770



SAB-DCHOA-SIL  
Hold Open Arm



Track Arm Including  
Hold Open - SIL



SAB-DC770-DP-SIL  
Drop Plate - 770



SAB-DC915-PA-SIL  
Drop Down PA Bracket