



Your business can earn
Qantas Points with us*.

*Find out more by calling Access Hardware customer service on
1800 555 600 or visit accesshardware.com.au. T&Cs apply.
qantasbusinessrewards.com/terms and accesshardware.com.au/qbr

840/940 AUTOMATIC FLUSH BOLTS

SUITABLE FOR TIMBER, METAL
AND ALUMINIUM DOORS

- Overload feature and low closing force
- Suitable for double doors
- Self latching adjustable bolts
- Top and bottom installation
- Minimum door thickness 35mm
- 19mm bolt throw
- Non handed



Fire Rated



Made in the **USA**



840/940 AUTOMATIC FLUSH BOLTS

SPECIFICATIONS

Automatic Flush Bolts can be installed in the top and bottom of the inactive door. Closing the active door automatically extends the bolts locking the inactive door. Opening the active door retracts the bolts releasing the inactive door.

Overload Feature: The over load feature prevents damage to doors or bolts should the bolt head be unable to extend into the top and bottom strikes.

Low Closing Force: Patented free floating cams requires less than 2.5kg closing force of the active door to extend both top and bottom bolts.

Adjustable Bolt Heads: Bolts can be vertically adjusted for unusual clearances. An adjustment of 31.2mm is available for the 840 Series and 12.5mm for the 940 Series.

Finish: Satin Stainless Steel

840 AUTO FLUSH BOLT

SAB-FB840-SSS

840 Series are suitable for aluminium and metal door pairs.





940 AUTO FLUSH BOLT

SAB-FB940-SSS

940 Series are suitable for timber door pairs.



DOOR PREP

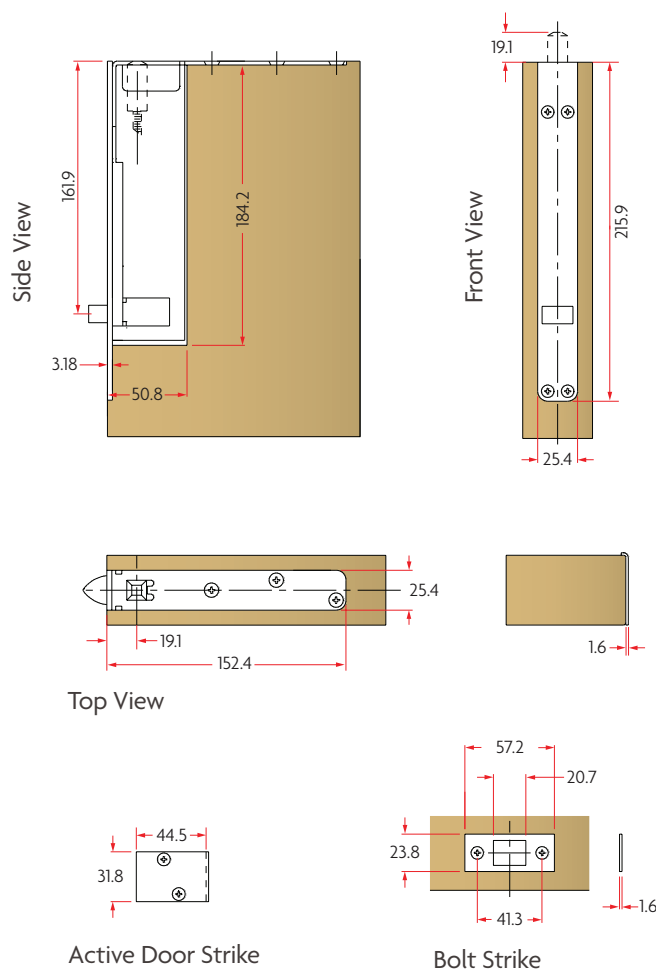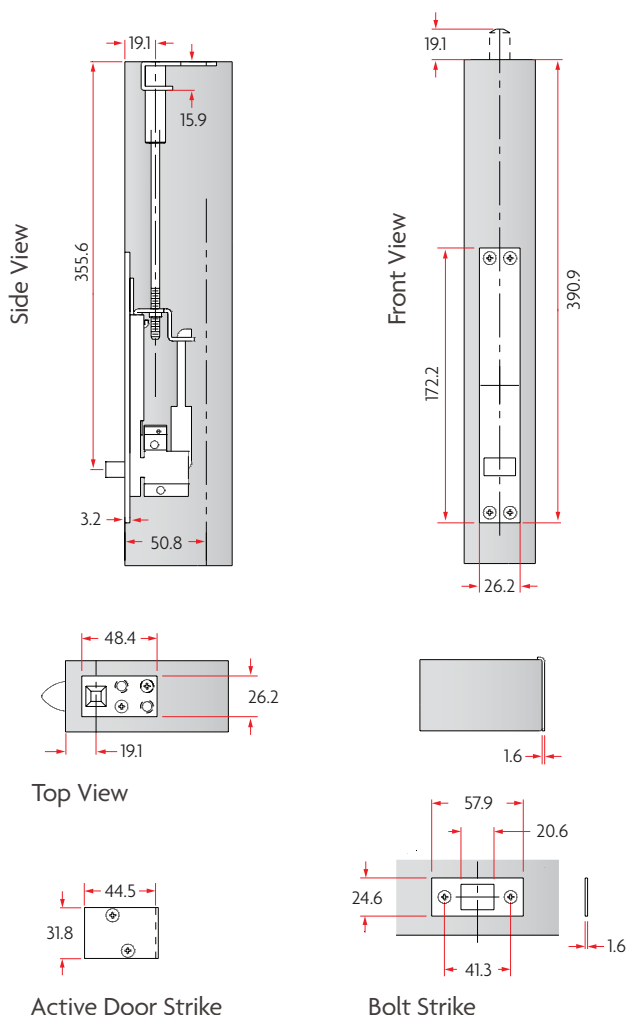

ACCESSORIES



SAB80
Spring Loaded Floor Ferrule



SAB-DPS-19-SSS
Dust Proof Socket 19mm