

## RP7



A rigid and flexible PVC door frame seal suitable for rebated timber frames. The RP7 rigid section can be painted. Used in conjunction with Raven door bottom seals and astragals.

**Location:** Timber head and jambs of single and double butt hinged doors.

**Min/Max Gap:** 0mm to 7mm (compression 1mm to 3mm).



**Fixing:** Nail fix. Zinc plated nails supplied.

**Seal:** White or brown rigid and flexible PVC. Can be painted.

**Sizes:** Available in single door sets.

### Approvals

**Energy** NCC Pt. 3.12.3.3 & J3.4.

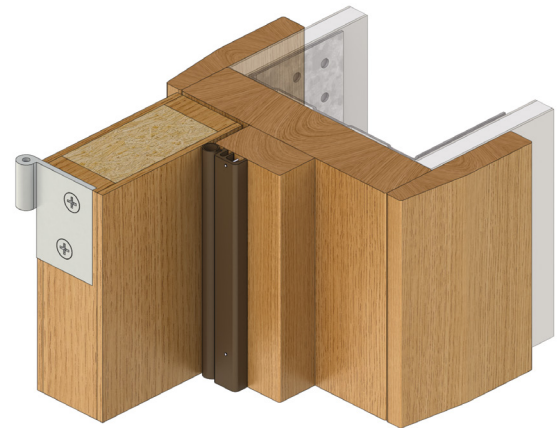

## RP10



An effective acoustic door stop frame seal which is quick and easy to install on plain or rebated door frames. Multi-fin design for improved noise and energy sealing. The minimum deflection design creates maximum sealing efficiency. RP10 can be mitred or butt jointed for a neat finish. Adjustable by large concealed fixing slots for a precision fit. RP10 has a tamper resistant, rigid PVC cover strip (SE). Can be used on all four sides of the door to form a bulk head seal.

*Note: If fixing to rebated frames of single doors, specify a long backset door latch.*

**Location:** Head and jambs of single and double butt hinged doors.

**Min/Max Gap:** 0mm to 10mm.

**Finish:** Satin clear (silver), bronze anodised aluminium (15µm) or paint at extra cost.

**Fixing:** Screw fix. Zinc plated, cross recess head S.T. screws supplied.

**Seal:** RP410. Black flexible PVC. Black rigid flexible PVC (SE) cover strip.

**Sizes:** Available in door set sizes or stock lengths.

### Approvals

**Acoustic AUS/NZ:** NCC Spec. F5.5.  
**UK/EU:** Approved Document E. Rated to BS EN ISO 717-1.

**Fire AUS/NZ:** NCC Spec. C3.4.  
AS1530.4 & AS/NZS 1905.1. NZ BC Compliance Doc. C/AS1 6.19.2 & App. C6.1.1.

**UK/EU:** Approved Document B.  
BS 476 Pt. 20 & 22 (similar to BS EN 1634-1).

**FRL & FRR-/240/30 and FD240.** 🔥

**Energy** NCC Pt. 3.12.3.3 & J3.4.

**Registered Design.**

