


**CA25 SERIES****SIZE EN2 ~ 5**

Fitted with standard arm

Max. door width (mm)	850 - 1100
Max. door weight (kg)	40-100
Max. opening angle	180°

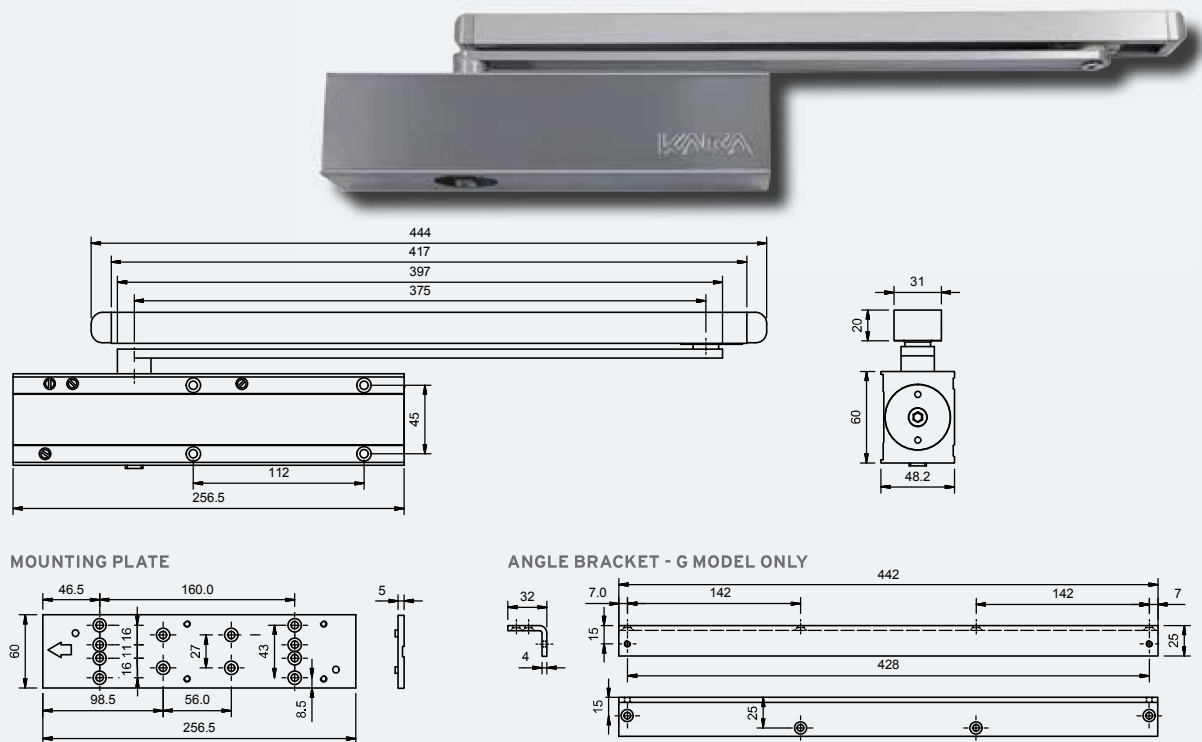

## CA25 Cam Action

The CA25 surface mounted door closer is a heavy duty, premium product suitable for most common doors in architectural and commercial applications.

The unit offers slide track operation, while the cam action feature provides a smooth and precise motion, facilitating minimal opening forces.

### Standard Features

- Closing force power adjustable (EN2-5)
- Compact extruded aluminium body
- Adjustable closing speed and latching speed
  - Thermo-constant valve
  - Closing speed action (180°~15°)
  - Latching speed action (15°~0°)
- Door leaf fixing
  - Model B is for pull side installation
  - Model G is for push side installation
- Adjustable backcheck (beyond 60°)
- Adjustable delay (180°~65°)
- Angle bracket supplied as standard with Model G

- Stainless steel box cover - available as an accessory
- Slide track as standard
- Mounting plate as standard for both models
- Optional hold open device supplied as standard

### Fire Rating

CA25 door closer have been successfully tested on fire door assemblies in accordance with Australian Standard AS1905 Part 1: Fire Resistant Door Sets.

**EN1154****FIRE RATED**

PRODUCT CODE	FINISH	DESCRIPTION
CA25SIL-B	SIL	Door closer C/A (EN2-5), pull side fix, silver
CA25SIL-G	SIL	Door closer C/A (EN2-5), push side fix, silver
CA25CSSS-B	SSS	Door closer C/A (EN2-5), pull side fix, inc. box cover SSS
CA25CSSS-G	SSS	Door closer C/A (EN2-5), push side fix, inc. box cover SSS