

IS1005si, IS1006si, IS1007si, IS1008si



Durable, bulb-type silicone compression seals, which can be easily kerf mounted into the rebates of timber door and window frames. These provide ideal smoke and acoustic seals for single action doors. These silicone compression seals can be fitted into a nominal 3mm wide kerf of sufficient depth.

Gap size

- IS1005si: Required Door Clearance 3-5mm
- IS1006si: Required Door Clearance 3-6mm
- IS1007si: Required Door Clearance 4-7mm
- IS1008si: Required Door Clearance 5-8mm

Standard lengths


- 50 metre coils

Standard colours

- Black
- Grey
- (Dark brown available to special order)

Approval/s

- Conforms with BCA Specification C3.4 smoke sealing requirements
- Acoustically tested in accordance with AS1191, ISO140.3 and ISO10140-2

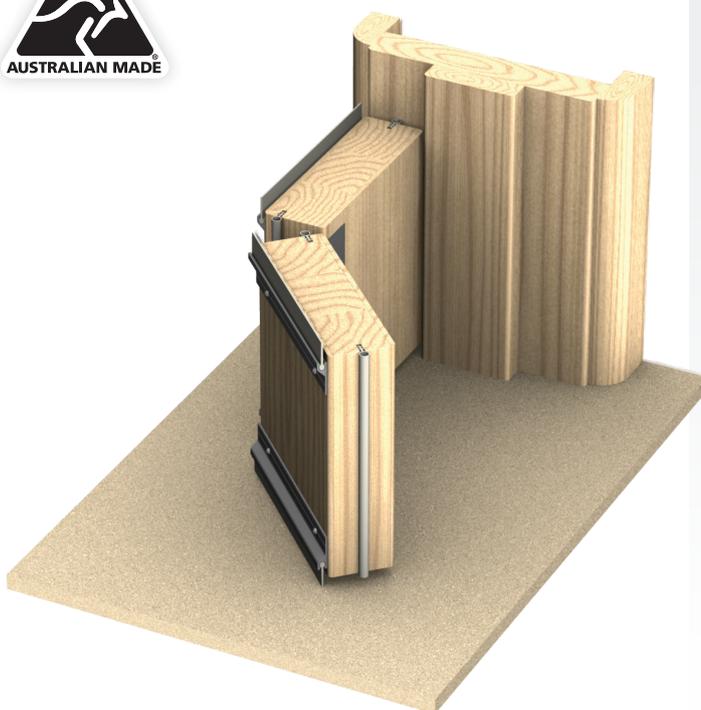

IS1005si



IS1006si



IS1007si



IS1008si

