



Kilargo IS1515 Flex-Wing Seal

- Black

LO-IS1515

PRODUCT OPTIONS


Door Seal Length: 2100mm

Single Door Set (1x1000mm, 2x2100mm)

Double Door Set (3x2100mm)

Long Single Door Set (1x1000mm, 2x2750mm)

Long Double Door Set (1x2000mm, 2x2750mm)

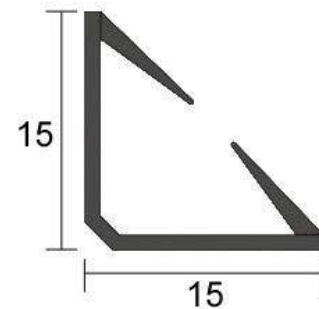

DESCRIPTION

These self-adhesive perimeter seals are fitted in the rebate of a door frame to contain smoke, sound, draughts, dust and light. Strategically located in the impact free zone, the seal adheres to the frame quickly and easily without having to remove the door.

The seal consists of a semi-rigid flame retardant PVC carrier combined with twin elastomeric sealing blades. An aggressive self-adhesive backing tape is situated on both sides of the carrier.

NB. To ensure proper adhesion, contact surfaces must be clean & any paint well-cured.

Gap Size

4-5mm

Approvals

Fire tested to AS1530 Part 4

Medium temperature smoke leakage tests to AS1530 Part 7

Conforms to BCA Specification C3.4 for smoke doors

Acoustic ratings to AS1191 and ISO140.3

Durability tests demonstrating over 100,000 open and close cycles

SPECIFICATION

MPN	IS1515
Brand	Kilargo
Product Width	15mm
Product Height	15mm
Product Warranty	2 Years
Product Finish or Colour	Black (BLK)
Product Material	Flame Retardant PVC
Fire Tested	Yes
Acoustic Rated to AS1191 and ISO140.3	Yes
Suitable for Smoke Doors	Yes
Suitable for Door Type	Timber Doors, Aluminium Doors
Contains Intumescent Material	No
Seal Can Be Installed	Surface Fix
Gasket / Seal Colour	Black




Kilargo IS1515 Flex-Wing Seal - Black

Scan to view online and for additional product information , or call us on **1800 555 600**.

Print Date: 9/5/25

Gasket Material	Flame Retardant PVC
Min Door Gap	4mm
Max Door Gap	5mm
Self Adhesive	Yes

ADDITIONAL IMAGES

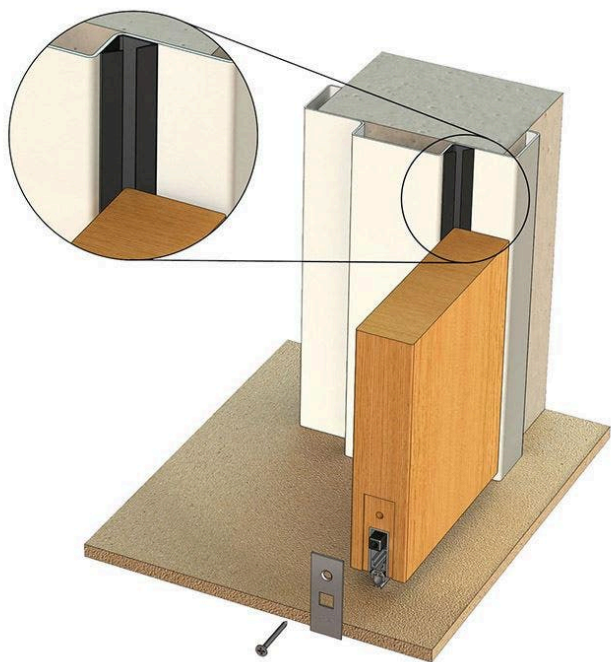

Kilargo IS1515 Flex-Wing Seal - Black

Scan to view online and for additional product information , or call us on **1800 555 600**.

Print Date: 9/5/25