



# Kilargo IS1515 Flex-Wing Seal

## - Black

LO-IS1515

### PRODUCT OPTIONS


Door Seal Length: 2100mm

Single Door Set (1x1000mm, 2x2100mm)

Double Door Set (3x2100mm)

Long Single Door Set (1x1000mm, 2x2750mm)

Long Double Door Set (1x2000mm, 2x2750mm)



### DESCRIPTION

These self-adhesive perimeter seals are fitted in the rebate of a door frame to contain smoke, sound, draughts, dust and light. Strategically located in the impact free zone, the seal adheres to the frame quickly and easily without having to remove the door.

The seal consists of a semi-rigid flame retardant PVC carrier combined with twin elastomeric sealing blades. An aggressive self-adhesive backing tape is situated on both sides of the carrier.

NB. To ensure proper adhesion, contact surfaces must be clean & any paint well-cured.

#### Gap Size

4-5mm

#### Approvals

Fire tested to AS1530 Part 4

Medium temperature smoke leakage tests to AS1530 Part 7


Conforms to BCA Specification C3.4 for smoke doors

Acoustic ratings to AS1191 and ISO140.3

Durability tests demonstrating over 100,000 open and close cycles

### SPECIFICATION

<b>MPN</b>	IS1515
<b>Brand</b>	Kilargo
<b>Product Width</b>	15mm
<b>Product Height</b>	15mm
<b>Product Finish or Colour</b>	Black (BLK)
<b>Product Material</b>	Flame Retardant PVC
<b>Fire Tested</b>	Yes
<b>Acoustic Rated to AS1191 and ISO140.3</b>	Yes
<b>Suitable for Smoke Doors</b>	Yes
<b>Suitable for Door Type</b>	Timber Doors, Aluminium Doors
<b>Contains Intumescent Material</b>	No
<b>Seal Can Be Installed</b>	Surface Fix
<b>Gasket / Seal Colour</b>	Black
<b>Gasket Material</b>	Flame Retardant PVC




#### Kilargo IS1515 Flex-Wing Seal - Black

Scan to view online and for additional product information, or call us on **1800 555 600**.

Print Date: 26/4/24

<b>Min Door Gap</b>	4mm
<b>Max Door Gap</b>	5mm
<b>Self Adhesive</b>	Yes
<b>Product Warranty</b>	2 Years

### ADDITIONAL IMAGES

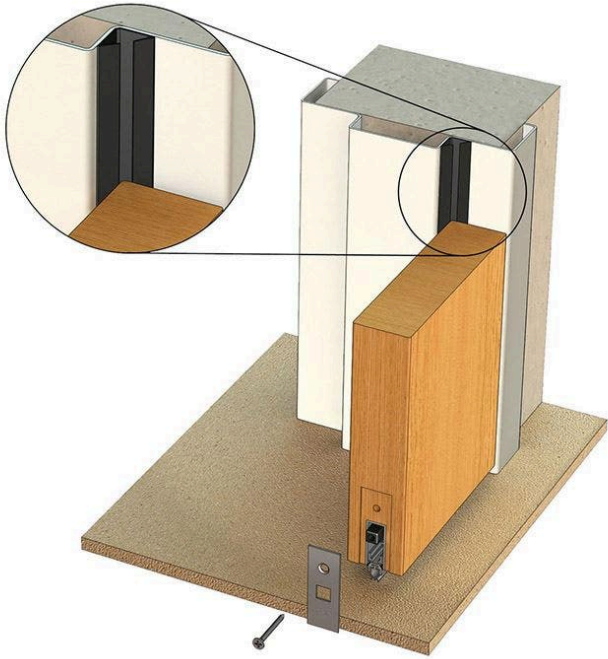

#### **Kilargo IS1515 Flex-Wing Seal - Black**

Scan to view online and for additional product information , or call us on **1800 555 600**.

Print Date: 26/4/24