




# Kilargo ISO511 Elastomeric Perimeter Seal - Black

LO-IS0511-T6

# **PRODUCT OPTIONS**

Door Seal Length: 1000mm

2100mm 2400mm 2700mm



## **DESCRIPTION**

Incorporated into door assemblies for its medium temperature smoke and acoustic properties. Also used as a privacy seal on toilet cubicle doors. This rigid PVC base seal has co-extruded flame retardant, twin flexible smoke and acoustic fins. It fits quickly and easily into a nominal 3mm (wide) by 5mm (deep) interference fit groove.

\* This seal is available with either a 4mm or 6mm fin height.

#### **Gap Size**

4mm Fin Height > min. 2mm / max. 3mm 6mm Fin Height > min. 3mm / max. 5mm

#### Colour

Black (white, grey & dark brown colours available to special order)

#### **Approvals**

Fire tested to AS1530 Part 4 in accordance with AS1905 Part 1

Medium temperature smoke leakage approvals to AS1530 Part 7 available on proprietary door assemblies

Conforms with NCC Specification C3.4 smoke sealing requirements

Acoustically tested in accordance with AS1191, IS0140.3 and ISO10140-2

Durability tests demonstrating over 100,000 open and close cycles

## **SPECIFICATION**

MPN IS0511 **Brand** Kilargo **Product Width** 6.2mm **Product Height** 10.5mm **Product Finish or Colour** Black (BLK) **Product Material** PVC **Fire Tested** Acoustic Rated to AS1191 and ISO140.3 Yes **Suitable for Smoke Doors** Yes


**Suitable for Door Type** Timber Doors

Contains Intumescent Material No



Seal Can Be InstalledRebatedGasket / Seal ColourBlackGasket MaterialPVCMin Door Gap3mmMax Door Gap5mmProduct Warranty2 Years

# **ADDITIONAL IMAGES**

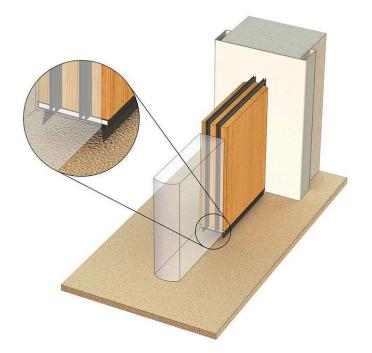





Print Date: 26/4/24