




Kilargo IS6020 Magnetic Seal

LO-IS6020

PRODUCT OPTIONS

Length: 1000mm
2250mm
2500mm

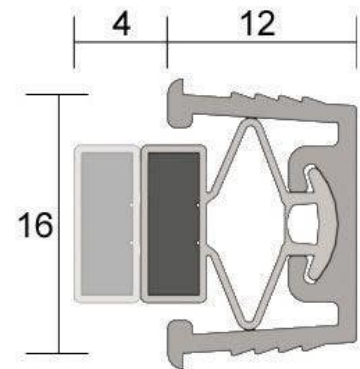

DESCRIPTION

The IS6020 magnetic seal is designed to be fitted to existing timber door leaves on double swing doors and sliding door meeting stiles. This seal has sufficient magnetic strength that latches may not be required. The aluminium carrier is toothed and splayed to lock into a 16.5mm x 12mm groove to prevent any 'creeping'.

Standard Lengths

1000mm
2250mm
2500mm
Also available in: 250mm increments from 1000mm to 3000mm (Special Order Only)

Standard Colours


Silver anodised aluminium with grey gasket and cover strip

Approvals

Acoustic ratings to AS1191 and ISO140.3

SPECIFICATION

| | |
|--|---------------------|
| MPN | IS6020 |
| Brand | Kilargo |
| Product Width | 16mm |
| Product Thickness | 16mm |
| Product Finish or Colour | Clear Anodised (CA) |
| Product Material | Aluminium |
| Includes Fixing Screws | No |
| Fire Tested | No |
| Acoustic Rated to AS1191 and ISO140.3 | Yes |
| Suitable for Smoke Doors | Yes |
| Suitable for Door Type | Timber |
| Contains Intumescent Material | No |
| Seal Can Be Installed | Rebated |
| Gasket / Seal Colour | Grey |
| Gasket Material | Magnetic |



Kilargo IS6020 Magnetic Seal

Scan to view online and for additional product information , or call us on **1800 555 600**.

Print Date: 13/3/24

Self Adhesive
Product Warranty

No
2 Years

ADDITIONAL IMAGES



Kilargo IS6020 Magnetic Seal

*Scan to view online and for additional product information , or call us on **1800 555 600**.*

Print Date: 13/3/24