




Kilargo IS3015si Door Bottom Seal 8mm - Clear Anodised Aluminium

LO-IS3015

PRODUCT OPTIONS

Door Seal Length: 1000mm
2250mm

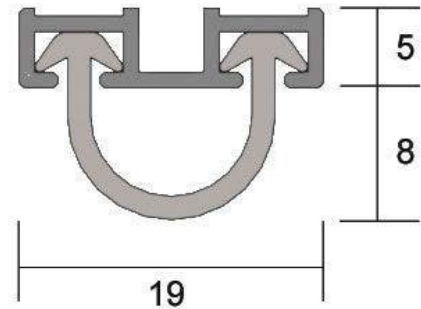

DESCRIPTION

The IS3015si seal is cleverly concealed in a rebated groove in the meeting stile or bottom of the door leaf (respectively) for single and double swing timber doors. These seals may be surface mounted or rebated into doors to allow for depth adjustment as required. Both seals can provide effective containment against medium and ambient temperature smoke, sound, dust, light, weather and vermin.

Gap Size

Min. 3mm / max. 8mm

Standard Lengths

1000mm

2250mm

Also available in: 250mm increments from 1000mm to 5000mm (Special Order Only)

Standard Colours

Silver anodised aluminium with grey silicone gasket
(black silicone gasket also available to special order)

Fixing

Fixing screws are supplied and fixing holes are pre-drilled
Push-fit gasket conceals fixings and allows for quick and easy installation

Approvals

Conforms to BCA Specification C3.4 for smoke doors (when fitted to compliant door leaves)

SPECIFICATION

MPN	IS3015SI
Brand	Kilargo
Product Height	13mm
Product Thickness	19mm
Product Finish or Colour	Clear Anodised (CA)
Product Material	Aluminium
Includes Fixing Screws	Yes
Fire Tested	No




Kilargo IS3015si Door Bottom Seal 8mm - Clear Anodised Aluminium

Scan to view online and for additional product information , or call us on **1800 555 600**.

Print Date: 20/4/24

Acoustic Rated to AS1191 and ISO140.3	Yes
Suitable for Smoke Doors	Yes
Suitable for Door Type	Timber Doors
Contains Intumescent Material	No
Seal Can Be Installed	Concealed
Gasket / Seal Colour	Grey
Gasket Material	Silicon Impregnated
Min Door Gap	3mm
Max Door Gap	8mm
Product Warranty	2 Years

ADDITIONAL IMAGES

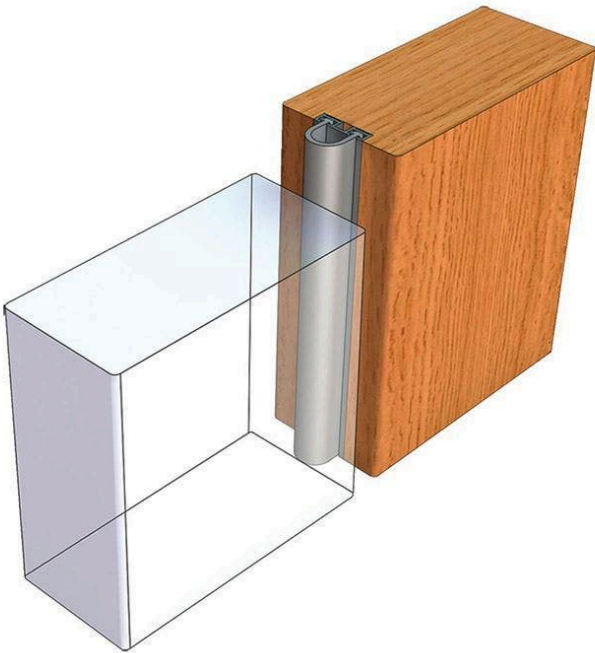

Kilargo IS3015si Door Bottom Seal 8mm - Clear Anodised Aluminium
Scan to view online and for additional product information , or call us on **1800 555 600**.

Print Date: 20/4/24