




# Kilargo IS3016si Door Bottom Seal 10mm - Clear Anodised Aluminium

LO-IS3016

## PRODUCT OPTIONS

Door Seal Length: 1000mm  
2250mm

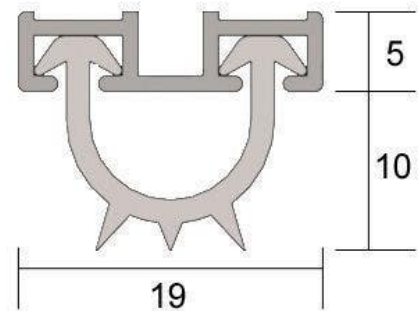

## DESCRIPTION

The IS3016si seal is cleverly concealed in a rebated groove in the meeting stile or bottom of the door leaf (respectively) for single and double swing timber doors. These seals may be surface mounted or rebated into doors to allow for depth adjustment as required. Both seals can provide effective containment against medium and ambient temperature smoke, sound, dust, light, weather and vermin.

### Gap Size

Min. 5mm / max. 9mm

### Standard Lengths

1000mm

2250mm

Also available in: 250mm increments from 1000mm to 5000mm (Special Order Only)

### Standard Colours

Silver anodised aluminium with grey silicone gasket  
(black silicone gasket also available to special order)

### Fixing

Fixing screws are supplied and fixing holes are pre-drilled  
Push-fit gasket conceals fixings and allows for quick and easy installation

### Approvals

Conforms to BCA Specification C3.4 for smoke doors (when fitted to compliant door leaves)

## SPECIFICATION

<b>MPN</b>	IS3016SI
<b>Brand</b>	Kilargo
<b>Product Height</b>	15mm
<b>Product Warranty</b>	2 Years
<b>Product Thickness</b>	19mm
<b>Product Finish or Colour</b>	Clear Anodised (CA)
<b>Product Material</b>	Aluminium
<b>Includes Fixing Screws</b>	Yes



### Kilargo IS3016si Door Bottom Seal 10mm - Clear Anodised Aluminium

Scan to view online and for additional product information , or call us on **1800 555 600**.

Print Date: 29/4/24

<b>Fire Tested</b>	No
<b>Acoustic Rated to AS1191 and ISO140.3</b>	Yes
<b>Suitable for Smoke Doors</b>	Yes
<b>Suitable for Door Type</b>	Timber Doors
<b>Contains Intumescent Material</b>	No
<b>Seal Can Be Installed</b>	Concealed
<b>Gasket / Seal Colour</b>	Grey
<b>Gasket Material</b>	Silicon Impregnated
<b>Min Door Gap</b>	5mm
<b>Max Door Gap</b>	9mm

## ADDITIONAL IMAGES



### **Kilargo IS3016si Door Bottom Seal 10mm - Clear Anodised Aluminium**

Scan to view online and for additional product information , or call us on **1800 555 600**.

Print Date: 29/4/24