




Kilargo IS8011si Automatic Door Bottom Seal - Clear Anodised Aluminium

LO-IS8011SI

PRODUCT OPTIONS

Door Seal Length: 380mm
600mm
820mm
920mm
1070mm
1220mm

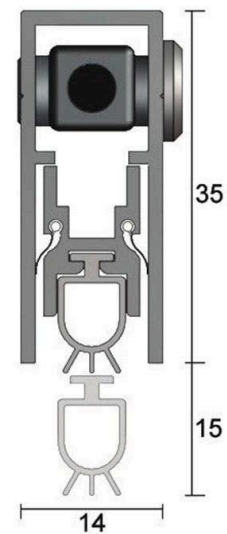

DESCRIPTION

A medium duty, automatic door bottom seal which can be face-fixed or semi-rebated to the bottom edge of single action doors. It operates automatically by a spring loaded mechanism which lifts the seal clear of the floor as soon as the door is opened. The seal is fixed to the face of the door bottom using the ferrules and mounting screws provided. When the seal is to be semi-rebated, the seal is mounted into a 35mm deep x 14mm wide machined groove in the side of the door where the seal is to be positioned. The seal operates automatically by pressure against the door jamb on its adjustable strike button. The seal contains a high efficiency mechanism to assist with the closing force requirements detailed in AS1428/1 (Design for Access and Mobility). Aesthetic, nylon push-fit end plates ensure longevity of the seal mechanism.

Gap Size

Min. 3mm / Max. 15mm

Standard Lengths with Maximum Cut-back sizes

380mm seal cuts to 275mm
600mm seal cuts to 380mm
820mm seal cuts to 600mm
920mm seal cuts to 820mm
1070mm seal cuts to 920mm
1220mm seal cuts to 1070mm

(*Longer lengths available to special order)

(*Seals can be cut on site for exact dimension).

Standard Colours

Silver anodised aluminium with grey end plates and grey silicone gasket.
(Black end plates and black silicone gasket also available upon request.)

Approvals

Face-fixed version fire tested to AS1530 Part 4
Conforms to BCA Specification C3.4 for smoke doors
Acoustic ratings to AS1191 and ISO140.3
Durability tests demonstrating over 1,000,000 open and close cycles



Kilargo IS8011si Automatic Door Bottom Seal - Clear Anodised Aluminium
Scan to view online and for additional product information , or call us on **1800 555 600**.

Print Date: 28/4/24

SPECIFICATION

MPN	IS8011SI
Brand	Kilargo
Product Height	35mm
Product Thickness	14mm
Product Finish or Colour	Clear Anodised (CA)
Product Material	Aluminium
Includes Fixing Screws	Yes
Fire Tested	Yes
Suitable for Smoke Doors	Yes
Acoustic Rated to AS1191 and ISO140.3	Yes
Suitable for Door Type	Timber Doors
Contains Intumescent Material	No
Seal Can Be Installed	Surface Fix
Gasket / Seal Colour	Grey
Gasket Material	Silicon Impregnated
Min Door Gap	3mm
Max Door Gap	15mm
Product Warranty	2 Years

ADDITIONAL IMAGES



Kilargo IS8011si Automatic Door Bottom Seal - Clear Anodised Aluminium
Scan to view online and for additional product information , or call us on **1800 555 600**.

Print Date: 28/4/24