




Kilargo IS5160H Sweep Action Seal 25mm - Clear Anodised Aluminium

LO-IS5160H

PRODUCT OPTIONS

Door Seal Length: 1000mm
2250mm
2500mm

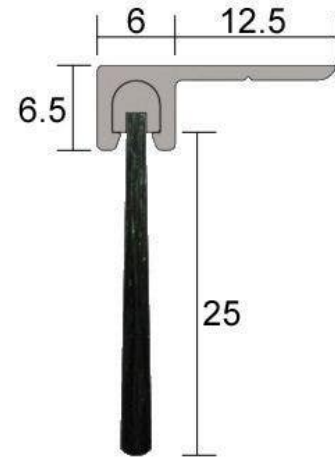

DESCRIPTION

The IS5160H seal is designed with a 90° angle aluminium carrier and is used to prevent draught and dust penetration on sliding doors.

The angled aluminium carriers can be fitted with either 13mm, 19mm or 25mm black nylon brush.
(50mm brush is also available upon request).

Gap Size

Min. 23mm / max. 29mm
(Dependent on brush size utilised.)

Brush Length

25mm

Standard Lengths

1000mm
2250mm
2500mm
Also available in: 250mm increments from 1000mm to 3000mm

Standard Finishes

Silver anodised aluminium carrier with black nylon brush

Fixing

Brush seals (within carriers) can be screw fixed or self-adhered to the desired surface
Fixing screws and aggressive backing tape are supplied

Approvals

Durability tests demonstrating over 100,000 open and close cycles

SPECIFICATION

MPN	IS5160H
Brand	Kilargo
Product Height	18.5mm



Kilargo IS5160H Sweep Action Seal 25mm - Clear Anodised Aluminium
Scan to view online and for additional product information , or call us on **1800 555 600**.

Print Date: 27/4/24

Product Thickness	31.5mm
Product Finish or Colour	Clear Anodised (CA)
Product Material	Aluminium
Includes Fixing Screws	Yes
Fire Tested	No
Acoustic Rated to AS1191 and ISO140.3	No
Suitable for Smoke Doors	No
Suitable for Door Type	Timber Doors, Aluminium Doors
Contains Intumescent Material	No
Seal Can Be Installed	Surface Fix
Brush / Gasket Length	25mm
Gasket Material	Nylon Brush
Self Adhesive	Yes
Product Warranty	2 Years

ADDITIONAL IMAGES



Kilargo IS5160H Sweep Action Seal 25mm - Clear Anodised Aluminium
Scan to view online and for additional product information , or call us on **1800 555 600**.

Print Date: 27/4/24