




Kilargo IS4100 Threshold Plate 10mm - Clear Anodised Aluminium

LO-IS4100

PRODUCT OPTIONS

Length: 1000mm
2250mm
2500mm

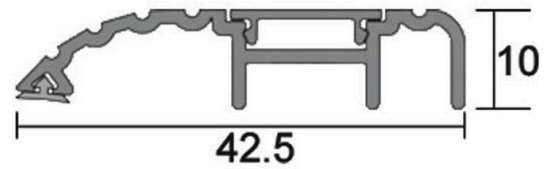

DESCRIPTION

The IS4100 threshold plate is used to prevent rain, draughts, light and vermin penetration. It is used in conjunction with the IS3070si door bottom seal. This threshold plate has a durable, anodised finish with a snap-fit cover strip for concealed fixings. It is supplied with a vinyl insert to help prevent moisture ingress under the threshold.

Standard Lengths

1000mm
2250mm
2500mm
Also available in: 250mm increments from 1000mm to 5000mm (Special Order Only)

Standard Finishes

Silver anodised aluminium

Fixing

Stainless Steel fixing screws and plugs are supplied

Approvals

Fire tested to AS1530 Part 4 in accordance with AS1905 Part 1

SPECIFICATION

MPN	IS4100
Brand	Kilargo
Product Width	42.5mm
Product Height	10mm
Product Finish or Colour	Clear Anodised (CA)
Product Material	Aluminium
Includes Fixing Screws	Yes
AS1428.1 Compliant	No
Fire Tested	Yes
Acoustic Rated to AS1191 and ISO140.3	No
Product Warranty	2 Years



Kilargo IS4100 Threshold Plate 10mm - Clear Anodised Aluminium

Scan to view online and for additional product information , or call us on **1800 555 600**.

Print Date: 28/4/24