




# Kilargo IS4110 Threshold Plate 5mm - Clear Anodised Aluminium

LO-IS4110

## PRODUCT OPTIONS

Length: 1000mm  
2250mm  
2500mm

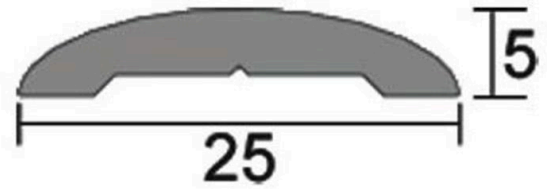

## DESCRIPTION

The IS4110 threshold plates is used in conjunction with other Kilargo door bottom seals to help prevent rain, draughts, and smoke penetration. Their low profile ensures compliance with the 'access for people with disability' requirements, particularly for wheelchair traffic.

### Standard Lengths

1000mm  
2250mm  
Also available in: 250mm increments from 1000mm to 5000mm (Special Order Only)

### Standard Finishes

Silver anodised aluminium

### Fixing

Stainless Steel fixing screws and plugs are supplied  
Alternatively, fasten with builder's adhesive for concealed fixing

### Approvals

Fire tested to AS1530 Part 4 in accordance with AS1905 Part 1  
Complies with AS1428 Part 1 (Design for access and mobility)  
Conforms to NCC D2.15 & D3.3 (Access for people with disabilities)

## SPECIFICATION

<b>MPN</b>	IS4110
<b>Brand</b>	Kilargo
<b>Product Width</b>	25mm
<b>Product Height</b>	5mm
<b>Product Finish or Colour</b>	Clear Anodised (CA)
<b>Product Material</b>	Aluminium
<b>Includes Fixing Screws</b>	Yes
<b>AS1428.1 Compliant</b>	Yes
<b>Fire Tested</b>	Yes
<b>Acoustic Rated to AS1191 and ISO140.3</b>	No
<b>Product Warranty</b>	2 Years



### Kilargo IS4110 Threshold Plate 5mm - Clear Anodised Aluminium

Scan to view online and for additional product information , or call us on **1800 555 600**.

Print Date: 29/4/24