




Kilargo IS4140 Threshold Plate - Clear Anodised Aluminium

LO-IS4140

PRODUCT OPTIONS

Length: 1000mm
2250mm
2500mm

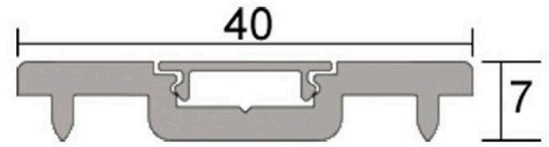

DESCRIPTION

The IS4140 threshold plate is used when a flat sealing surface is required where carpet runs under the door. It is used in conjunction with other Kilargo door bottom seals to help prevent draught, insect and smoke penetration. Their low profile ensures compliance with the 'access for people with disability' requirements, particularly for wheelchair traffic. The durable, anodised profile has a snap-fit cover strip for concealed fixings.

Standard Lengths

1000mm
2250mm
2500mm
Also available in: 250mm increments from 1000mm to 5000mm (Special Order Only)

Standard Finishes

Silver anodised aluminium

Fixing

Stainless Steel fixing screws and plugs are supplied
Alternatively, fasten with builder's adhesive for concealed fixing

Approvals

Fire tested to AS1530 Part 4 in accordance with AS1905 Part 1
Complies with AS1428/1 (Design for access and mobility)
Conforms to NCC D2.15 & D3.3 (Access for people with disabilities)

SPECIFICATION

MPN	IS4140
Brand	Kilargo
Product Width	40mm
Product Height	7mm
Product Warranty	2 Years
Product Finish or Colour	Clear Anodised (CA)
Product Material	Aluminium
Includes Fixing Screws	Yes




Kilargo IS4140 Threshold Plate - Clear Anodised Aluminium

Scan to view online and for additional product information , or call us on **1800 555 600**.

Print Date: 2/5/24

AS1428.1 Compliant	Yes
Fire Tested	Yes
Acoustic Rated to AS1191 and ISO140.3	No

ADDITIONAL IMAGES

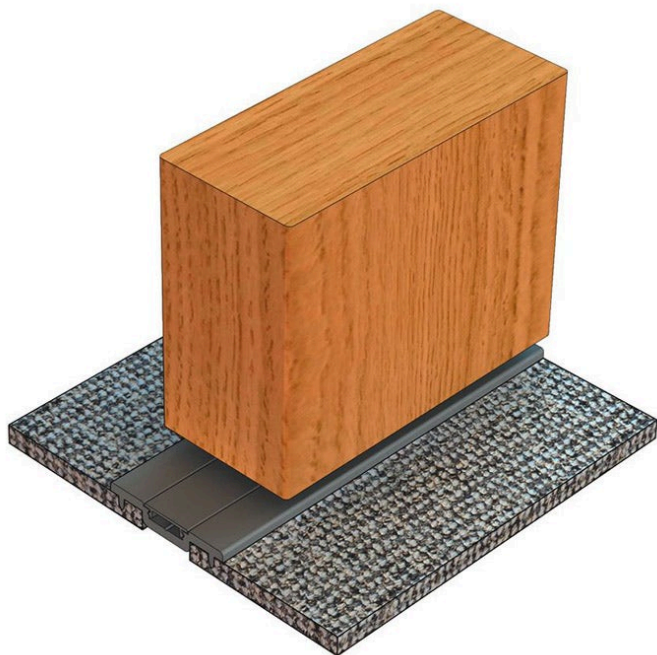

Kilargo IS4140 Threshold Plate - Clear Anodised Aluminium

Scan to view online and for additional product information , or call us on **1800 555 600**.

Print Date: 2/5/24