




Kilargo IS7080 Perimeter Seal - Clear Anodised Aluminium

LO-IS7080

PRODUCT OPTIONS

Door Seal Length: 1000mm
2250mm
2500mm
Single Door Set (1x1000mm, 2x2100mm)
Double Door Set (3x2100mm)
Long Single Door Set (1x1000mm, 2x2750mm)
Long Double Door Set (1x2000mm, 2x2750mm)

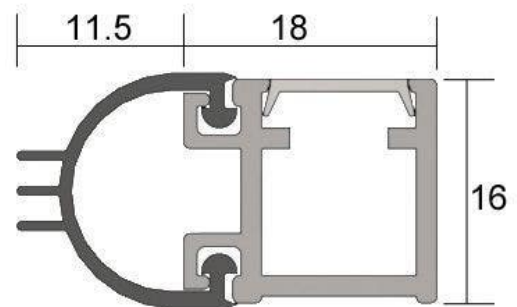

DESCRIPTION

The IS7080 is an aesthetically designed, compact perimeter seals, proven to be effective acoustic, cold smoke, light and weather seals. Both can be installed in lieu of a door stop on both steel and timber door frames (where frames are non fire-rated). The fixing holes are pre-drilled and slotted to allow the seal to be adjusted and positioned accurately. A decorative cover strip is supplied to conceal fixings.

Gap Size

Min. 0mm / Max. 10mm

Standard Lengths

1000mm
2250mm
2500mm
Also available in: 250mm increments from 1000mm to 5000mm (by special order only)
Single Door Set (1 x 1000mm, 2 x 2100mm)
Long Single Door Set (1 x 1000mm, 2 x 2750mm)
Double Door Set (3 x 2100mm)
Long Double Door Set (1 x 2100mm, 2 x 2750mm)

Standard Finishes

Silver anodised aluminium with grey gasket and grey cover strip
(black anodised aluminium with black silicone gasket and black cover strip to special order)

Fixing

When fixing IS7080 to rebated frames of single doors, specify a long back set door latch

Approvals

IS7080si fire tested to AS1530 Part 4 in accordance with AS1905 Part 1
Medium temperature smoke leakage approvals to AS1530 Part 7 available on proprietary door assemblies (silicone version)
Acoustically tested in accordance with AS1191, ISO140.3 and ISO10140-2



Kilargo IS7080 Perimeter Seal - Clear Anodised Aluminium

Scan to view online and for additional product information , or call us on **1800 555 600**.

Print Date: 29/4/24

SPECIFICATION

MPN	IS7080
Brand	Kilargo
Product Width	29.5mm
Product Height	16mm
Product Warranty	2 Years
Product Finish or Colour	Clear Anodised (CA)
Product Material	Aluminium
Includes Fixing Screws	Yes
Fire Tested	Yes
Acoustic Rated to AS1191 and ISO140.3	Yes
Suitable for Smoke Doors	Yes
Suitable for Door Type	Timber Doors, Aluminium Doors
Contains Intumescent Material	No
Seal Can Be Installed	Surface Fix
Gasket / Seal Colour	Black
Gasket Material	Rubber
Min Door Gap	0mm
Max Door Gap	10mm
Self Adhesive	No

ADDITIONAL IMAGES

