




# Raven RP126Si Automatic Door Bottom Seal - Clear Anodised Aluminium

RP126Si

## PRODUCT OPTIONS

Door Seal Length: 600mm  
820mm  
920mm  
1070mm  
1220mm  
1500mm

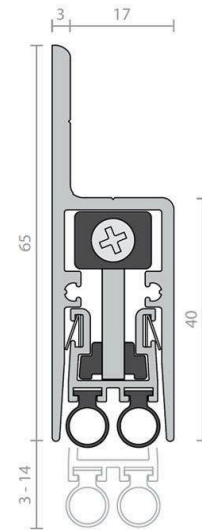

## DESCRIPTION

An adjustable, automatic door bottom seal that is spring loaded to lift clear of the floor when the door is opened. Acoustically designed, featuring extruded silicon gaskets for medium temperature smoke applications. RP126Si is operated automatically by pressure on the door jamb or stop by its adjustable strike.

Location: Face mounted or semi-morticed into the bottom of single and double solid core butt hinged doors. Minimum door thickness of 35mm recommended for semi-morticed installations with plain meeting stiles. Minimum door thickness of 40mm recommended for semi-morticed installation with rebated meeting stiles. RP126Si can also be face mounted to the bottom of metal doors.

Min/Max Gap: 3mm to 14mm.

Finish: Satin clear (silver) anodised aluminium (15micron) or paint at extra cost.

Fixing: Screw fix. Colour matched escutcheon plates and zinc plated, cross recess head S.T. screws supplied.

Seal: RP3126Si. Black Silicon Rubber (SE).

Sizes: 1500mm, 1220mm, 1070mm, 920mm, 820mm, 600mm to 305mm(min). Seals cut back to exact size.

### Approvals

UL Cert. GVYI.R37913

Acoustic AUS/NZ: NCC Spec. F5.5.

UK/EU: Approved Document E. Rated to BS EN ISO 717.1.

Fire AUS/NZ: NCC Spec. C3.4. AS1530.4 & AS/NZS 1905.1. NZ BC Compliance Doc. C/AS1 6.19.2 & App. C6.1.1.

UK/EU: Approved Document B. BS EN 1634-1.

FRL & FRR-/240/30. Fire Approved

Gasket flammability index 1 when tested to AS1530.2.

Smoke NCC Spec. C3.4. AS1530.7 & BS EN 1634-3. Meets smoke leakage rates specified in AS6905 & EN 13501-2.

Energy NCC Pt. 3.12.3.3 & J3.4.

Durability Tested to over 1,000,000 operating cycles without failure.

Patented, Registered Design.

## SPECIFICATION

MPN	A126SIC
Brand	Raven
Product Height	65mm




**Raven RP126Si Automatic Door Bottom Seal - Clear Anodised Aluminium**  
Scan to view online and for additional product information , or call us on **1800 555 600**.

Print Date: 20/4/24

<b>Product Thickness</b>	20mm
<b>Product Finish or Colour</b>	Clear Anodised (CA)
<b>Product Material</b>	Aluminium
<b>Includes Fixing Screws</b>	Yes
<b>Fire Tested</b>	Yes
<b>Suitable for Smoke Doors</b>	Yes
<b>Acoustic Rated to AS1191 and ISO140.3</b>	Yes
<b>Suitable for Door Type</b>	Timber Doors
<b>Bush Fire Attack Level</b>	Fire Zone
<b>Contains Intumescent Material</b>	No
<b>Seal Can Be Installed</b>	Surface Fix / Semi-Rebated
<b>Gasket / Seal Colour</b>	Black
<b>Gasket Material</b>	Silicon Impregnated
<b>Min Door Gap</b>	3mm
<b>Max Door Gap</b>	14mm
<b>Product Warranty</b>	2 Years

## ADDITIONAL IMAGES

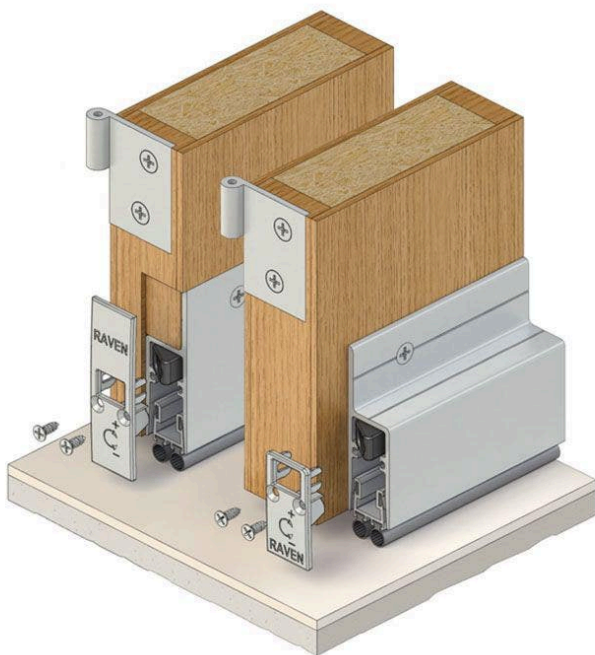

**Raven RP126Si Automatic Door Bottom Seal - Clear Anodised Aluminium**  
 Scan to view online and for additional product information , or call us on **1800 555 600**.

Print Date: 20/4/24