




Raven RP128Si Automatic Door Bottom Seal - Clear Anodised Aluminium

RP128SI

PRODUCT OPTIONS

Door Seal Length: 600mm

820mm 920mm 1070mm 1220mm 1500mm



DESCRIPTION

An adjustable, automatic door bottom seal that is spring loaded to lift clear of the floor when the door is opened. Acoustically designed, featuring extruded silicon gaskets for medium temperature smoke applications, the RP128Si is operated automatically by pressure on the door stop by its adjustable strike. Utilising an aesthetic extruded aluminium cover for concealed fixing.

Location: Face mounted to the bottom of single and double solid core butt hinged doors. RP128Si can also be face mounted to the bottom of metal doors.

Min/Max Gap: 3mm to 14mm.

Finish: Satin clear (silver), black anodised aluminium (15micron) or paint at extra cost.

Fixing: Concealed screw fix. Zinc plated, cross recess head S.T. screws supplied. Colour matched escutcheon plates and face mount aluminium angle included.

Seal: RP3126Si. Black silicon rubber (SE).

Sizes: 1500mm, 1220mm, 1070mm, 920mm, 820mm, 600mm to 305mm (min). Seals cut back to exact size.

Approvals

UL Cert. GVYI.R37913

Acoustic AUS/NZ: NCC Spec. F5.5.

UK/EU: Approved Document E. Rated to BS EN ISO 717.1.

Fire AUS/NZ: NCC Spec. C3.4. AS1530.4 & AS/NZS 1905.1. NZ BC Compliance Doc. C/AS1 6.19.2 & App. C6.1.1.

FRL & FRR-/240/30. Fire Approved

Gasket flammability index 1 when tested to AS1530.2.

Smoke NCC Spec. C3.4. AS1530.7 & BS EN 1634-3. Meets smoke leakage rates specified in AS6905 & EN 13501-2 "Sa", "Sm".

Energy NCC Pt. 3.12.3.3 & J3.4.

Durability Tested to over 1,000,000 operating cycles without failure.

Patented, Registered Design.

SPECIFICATION

MPN A128SIC
Brand Raven
Product Height 65mm
Product Warranty 2 Years



Product Thickness 20mm

Product Finish or Colour Clear Anodised (CA)

Product MaterialAluminiumIncludes Fixing ScrewsYesFire TestedYes

Suitable for Smoke Doors Yes
Acoustic Rated to AS1191 and ISO140.3 Yes


Suitable for Door Type Timber Doors, Aluminium Doors

Bush Fire Attack LevelFire ZoneContains Intumescent MaterialNoSeal Can Be InstalledSurface FixGasket / Seal ColourBlack

Gasket Material Silicon Impregnated

Min Door Gap3mmMax Door Gap14mm

ADDITIONAL IMAGES

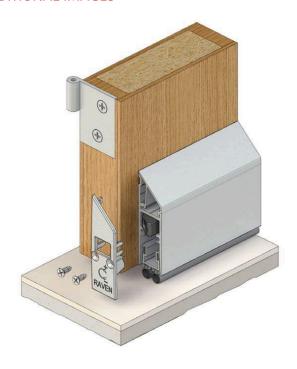



Print Date: 1/5/24