




Raven RP98 Threshold Plate 19mm - Clear Anodised Aluminium

RP98

PRODUCT OPTIONS

Product Length: 1000mm
1250mm
2000mm
2500mm
3000mm

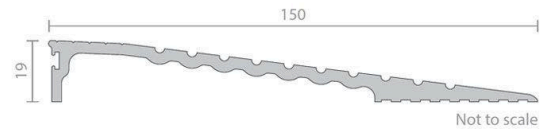

DESCRIPTION

A heavy duty threshold ramp with a ribbed design which can be positioned back to back to form a two way threshold ramp conforming to NCC Pt. D2.15 Thresholds (b).

Can be used in conjunction with Raven door bottom seals to prevent rain, draughts, noise and smoke infiltration. Suitable for use with most floor pivots.

Ideal for commercial shop fronts providing a neat ramp detail between carpets or tiles at door ways.

Can also be used to provide a ramped frame for internal door mats.

Location: Door sill.

Finish: Satin clear (silver) anodised aluminium (25micron).

Fixing: Screw fix. Zinc plated, cross recess head CSK S.T. screws supplied. Can be fastened with builders adhesive for concealed fixing.

Sizes: Available in stock lengths.

Specify longer length than doorway to allow for neat installation around door frame.

Approvals

UL Cert. GVYI.R37913

Access & Mobility AUS/NZ: NCC D2.15 & D3.3. AS1428.1. NZ BC Compliance Doc. D1/AS1 1.3.2.

UK/EU: Approved Document M.

Fire AUS/NZ: NCC Spec. C3.4. AS1530.4 & AS/NZS 1905.1. NZ BC Compliance Doc. C/AS1 6.19.2(a) & App. C6.1.1.

UK/EU: Approved Document B. BS 476 Pt. 20 & 22 (similar to BS EN 1634-1).

FRL & FRR-/240/30. Fire Approved

Fire Approved when used with a BAL rated door bottom seal in accordance with AS 3959.

SPECIFICATION

MPN	A98C
Brand	Raven
Product Width	150mm
Product Height	19mm
Product Finish or Colour	Clear Anodised (CA)
Product Material	Aluminium
Includes Fixing Screws	Yes
AS1428.1 Compliant	Yes
Fire Tested	Yes




Raven RP98 Threshold Plate 19mm - Clear Anodised Aluminium

Scan to view online and for additional product information , or call us on **1800 555 600**.

Print Date: 25/4/24

Acoustic Rated to AS1191 and ISO140.3 No
Product Warranty 2 Years

ADDITIONAL IMAGES

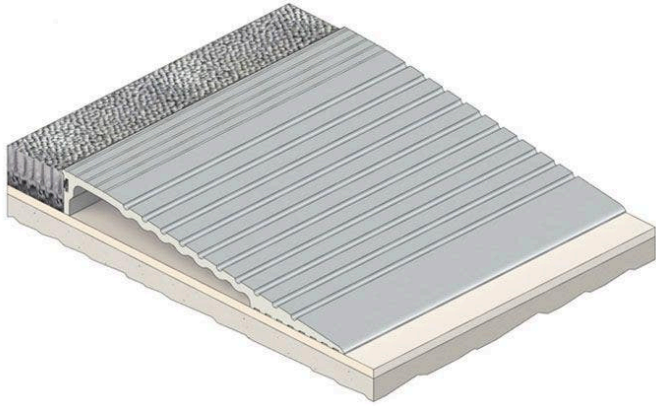

Raven RP98 Threshold Plate 19mm - Clear Anodised Aluminium
Scan to view online and for additional product information , or call us on **1800 555 600**.

Print Date: 25/4/24