



Raven RP10 Perimeter Seal - Clear Anodised Aluminium

RP10

PRODUCT OPTIONS

Door Seal Length: 1000mm

1250mm

2000mm

2250mm

2500mm

2750mm


3000mm

Single Door Set (1x1000mm, 2x2100mm)

Double Door Set (3x2100mm)

Long Single Door Set (1x1000mm, 2x2750mm)

Long Double Door Set (1x2000mm, 2x2750mm)

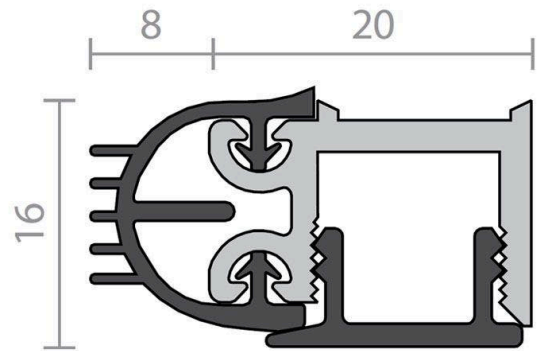

DESCRIPTION

An effective acoustic door stop frame seal which is quick and easy to install on plain or rebated door frames. Multi-fin design for improved noise and energy sealing. The minimum deflection design creates maximum sealing efficiency.

RP10 can be mitred or butt jointed for a neat finish. Adjustable by large concealed fixing slots for a precision fit. RP10 has a tamper resistant, rigid PVC cover strip (SE). Can be used on all four sides of the door to form a bulk head seal.

Note: If fixing to rebated frames of single doors, specify a long backset door latch.

Location: Head and jambs of single and double butt hinged doors.

Min/Max Gap: 0mm to 10mm

Finish: Satin clear (silver), bronze anodised aluminium (15micron) or paint at extra cost.

Fixing: Screw fix. Zinc plated, cross recess head S.T. screws supplied.

Seal: RP410. Black flexible PVC. Black rigid flexible PVC (SE) cover strip.

Sizes: Available in door set sizes or stock lengths.

Approvals

Acoustic AUS/NZ: NCC Spec. F5.5.

UK/EU: Approved Document E. Rated to BS EN ISO 717.1.

Fire AUS/NZ: NCC Spec. C3.4. AS1530.4 & AS/NZS 1905.1. NZ BC Compliance Doc. C/AS1 6.19.2 & App. C6.1.1.

UK/EU: Approved Document B. BS 476 Pt. 20 & 22 (similar to BS EN 1634-1).

FRL & FRR-/240/30 and FD240. Fire Approved

Energy NCC Pt. 3.12.3.3 & J3.4.

SPECIFICATION