




# Raven RP12 Perimeter Seal - Clear Anodised Aluminium

RP12

## PRODUCT OPTIONS

Door Seal Length: 1000mm  
2250mm  
3000mm

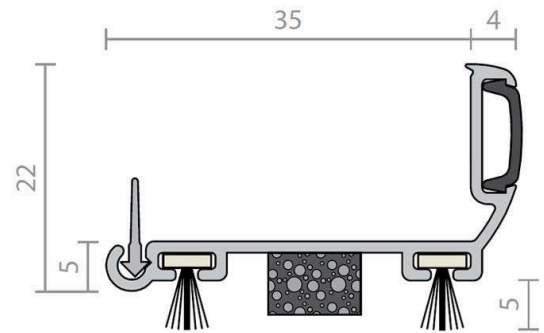

## DESCRIPTION

The RP12 has a woven pile weather strip with unique Quiet-fins for noise protection. Ideal for sliding doors and designed to limit noise leakage and control dust and air movement. The RP12 is quick and easy to install to the door or frame.

Can be used in conjunction with a double row of RP2 seals fitted into grooves in the door bottom edge or face mount RP74 to achieve a complete sealing system.

Location: Head and jambs of door frames.

Min/Max Gap: 6mm to 8mm (prior to installation).

Finish: Satin clear (silver), bronze anodised aluminium (15micron) or paint at extra cost.

Fixing: Concealed screw fix. Zinc plated, cross recess head S.T. screws and cover strip supplied. Fixing holes are pre-slotted to allow the seals to be fitted accurately and adjustment to be made for building movement.

Seal: Black polypropylene pile with felt weather fins.

Sizes: Available in stock lengths.

Approvals

Energy NCC Pt. 3.12.3.3 & J3.4.

## SPECIFICATION

<b>MPN</b>	A12C
<b>Brand</b>	Raven
<b>Product Width</b>	35mm
<b>Product Height</b>	22mm
<b>Product Finish or Colour</b>	Clear Anodised (CA)
<b>Product Material</b>	Aluminium
<b>Includes Fixing Screws</b>	Yes
<b>Fire Tested</b>	No
<b>Acoustic Rated to AS1191 and ISO140.3</b>	Yes
<b>Suitable for Smoke Doors</b>	No
<b>Suitable for Door Type</b>	Timber Doors, Aluminium Doors
<b>Contains Intumescent Material</b>	No
<b>Seal Can Be Installed</b>	Surface Fix
<b>Gasket / Seal Colour</b>	Black
<b>Gasket Material</b>	Nylonpolypropylene
<b>Min Door Gap</b>	6mm




### Raven RP12 Perimeter Seal - Clear Anodised Aluminium

Scan to view online and for additional product information , or call us on **1800 555 600**.

Print Date: 27/4/24

<b>Max Door Gap</b>	8mm
<b>Self Adhesive</b>	No
<b>Product Warranty</b>	2 Years

**ADDITIONAL IMAGES**

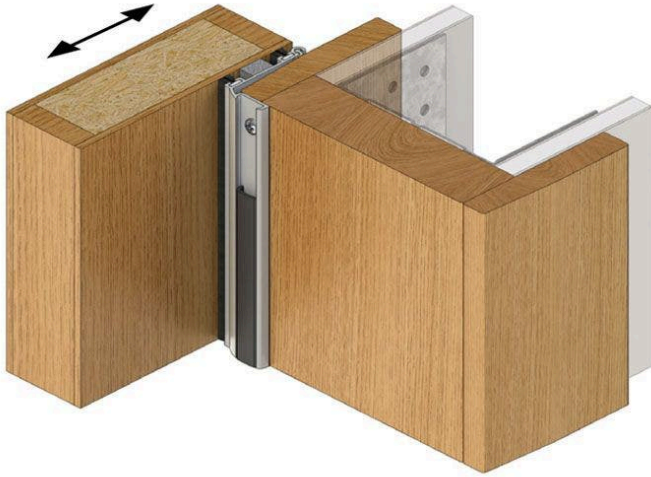

**Raven RP12 Perimeter Seal - Clear Anodised Aluminium**  
Scan to view online and for additional product information , or call us on **1800 555 600**.

Print Date: 27/4/24