




# Raven RP47Si Perimeter Seal - Clear Anodised Aluminium

RP47Si

## PRODUCT OPTIONS

Door Seal Length: 1000mm  
2250mm  
2500mm  
2750mm  
3000mm  
Single Door Set (1x1000mm, 2x2100mm)  
Double Door Set (3x2100mm)  
Long Single Door Set (1x1000mm, 2x2750mm)  
Long Double Door Set (1x2000mm, 2x2750mm)

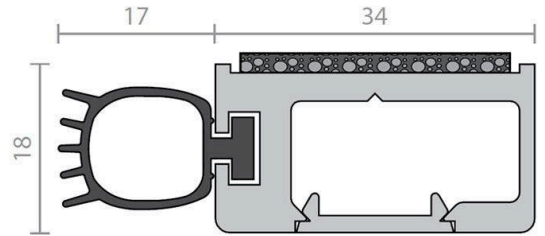

## DESCRIPTION

A heavy duty seal designed to replace the conventional door stop. The RP47Si is ideal for medium temperature smoke / fire door applications and has excellent acoustic qualities for heavy traffic areas. With concealed fixings and adjustable fastener slots to achieve an optimum seal, a space for low voltage cable management can be found behind a tamper proof cover strip. RP47Si can be mitred or butt jointed for a neat installation. Can be used on all four sides of the door to form a bulk head seal.

Note: If fixing to rebated frames of single doors, specify a long backset door latch.

Location: Head and jambs of single and double butt hinged doors or bulk head applications.

Min/Max Gap: 0mm to 17mm.

Finish: Satin clear (silver) STANDARD, (black anodised aluminium (15micron) or paint at extra cost SPECIAL ORDER).

Fixing: Concealed screw fix. Zinc plated, Tek self drilling screws (metal) supplied.

Seal: RP347Si. Black silicon rubber (SE).

Sizes: Available in door set sizes or stock lengths.

### Approvals

UL Cert. GVV1.R37913.

Acoustic AUS/NZ: NCC Spec. F5.5.

UK/EU: Approved Document E. Rated to BS EN ISO 717.1.

Fire AUS/NZ: NCC Spec. C3.4. NZ BC Compliance Doc C/AS1 6.19.2 & App C6.1.1.

UK/EU: Approved Document B. BE EN 1634-1.

FRL & FRR-/240/30. Fire Approved To be used on door frames with a 25mm stop.

Gasket flammability index 1 when tested to AS1530.2.

Smoke NCC Spec. C3.4. AS1530.7 & BS EN 1634-3. Meets smoke leakage rates specified in AS6905 & EN 13501-2 "Sa", "Sm".

Energy NCC Pt. 3.12.3.3 & J3.4.

## SPECIFICATION