




# Raven RP65 Magnetic Astragal Seal - Clear Anodised Aluminium

RP65

## PRODUCT OPTIONS

Door Seal Length: 2250mm  
3000mm

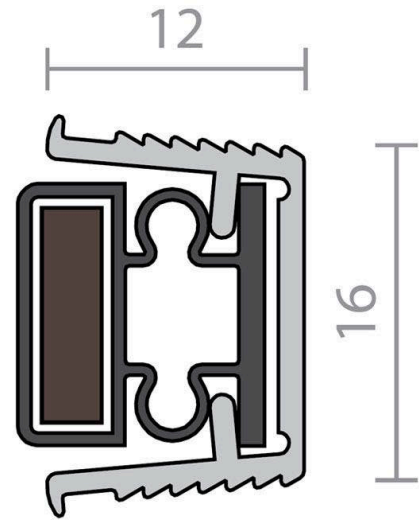

## DESCRIPTION

A refrigeration type vinyl magnetic strip in an anodised aluminium channel which is morticed into the stiles of pivot, sliding or butt hinged double doors, to form an effective astragal. The magnetic strip is locked in place to prevent creeping and has sufficient strength that latches may not be required (centre latching can not be used).

Can be used in conjunction with Raven door bottom and perimeter seals.

Note: RP65 is best suited to infrequent use and door closer hold open applications.

Location: Meeting stiles of double swinging and sliding timber doors.

Min/Max Gap: 5mm to 7mm. (Swing doors).

Finish: Satin clear (silver) anodised aluminium (15micron).

Fixing: Push-in locking fit into a 16.5mm x 12mm deep groove and optional adhesive. Minimum door thickness of 40mm required.

Seal: Black PVC with magnetic strip.

Sizes: Available in stock lengths.

Approvals

Energy NCC Pt. 3.12.3.3 & J3.4.

## SPECIFICATION

<b>MPN</b>	A65C
<b>Brand</b>	Raven
<b>Product Thickness</b>	12mm
<b>Product Finish or Colour</b>	Clear Anodised (CA)
<b>Product Material</b>	Aluminium
<b>Includes Fixing Screws</b>	No
<b>Fire Tested</b>	No
<b>Acoustic Rated to AS1191 and ISO140.3</b>	Yes
<b>Suitable for Smoke Doors</b>	Yes
<b>Suitable for Door Type</b>	Timber Doors
<b>Bush Fire Attack Level</b>	BAL <29
<b>Contains Intumescent Material</b>	No
<b>Seal Can Be Installed</b>	Rebated
<b>Gasket / Seal Colour</b>	Black
<b>Gasket Material</b>	Magnetic Vinyl
<b>Min Door Gap</b>	5mm




### Raven RP65 Magnetic Astragal Seal - Clear Anodised Aluminium

Scan to view online and for additional product information , or call us on **1800 555 600**.

Print Date: 26/4/24

<b>Max Door Gap</b>	7mm
<b>Self Adhesive</b>	No
<b>Product Warranty</b>	2 Years

**ADDITIONAL IMAGES**

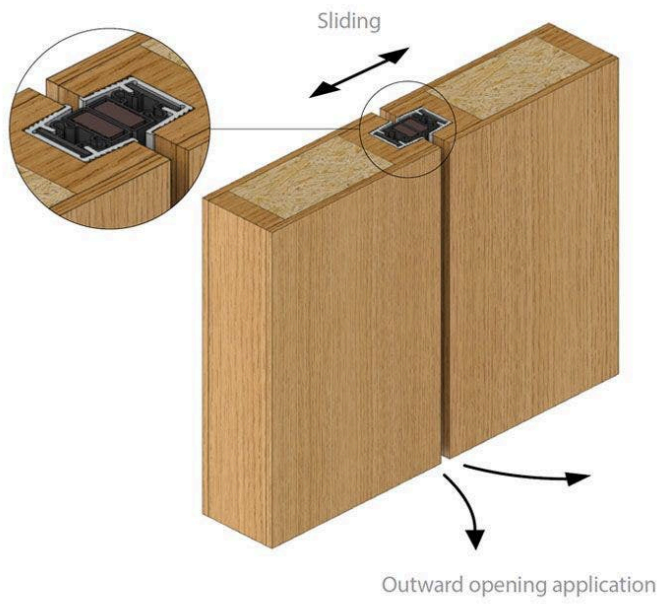

**Raven RP65 Magnetic Astragal Seal - Clear Anodised Aluminium**  
Scan to view online and for additional product information , or call us on **1800 555 600**.

Print Date: 26/4/24