




# Raven RP2 Brush Seal 19mm - Brush Only

RP2

## PRODUCT OPTIONS

Door Seal Length: 1000mm  
2250mm  
3000mm

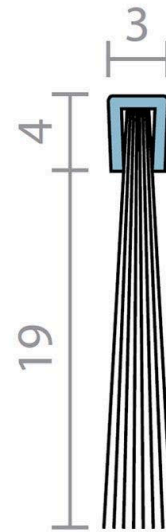

## DESCRIPTION

Nylon brush strip seals without holder, that are fitted in a concealed manner into a machined groove in a door. Where a small clearance is encountered, the groove should be double morticed to allow the brush to flex.

Location: Stiles or bottom of single, double, sliding and double acting timber doors.

Min/Max Gap: Up to 19mm (user determined).

Fixing: Inserted into morticed groove (optional adhesive if required). Where a small clearance is encountered, the groove should be double morticed to allow the brush to flex.

Seal: Black fine, dense, UV stabilised nylon filaments secured in a galvanised steel spine.

Sizes: Available in stock lengths.

Approvals

Energy NCC Pt. 3.12.3.3 & J3.4.

## SPECIFICATION

<b>MPN</b>	A2BO
<b>Brand</b>	Raven
<b>Product Height</b>	23mm
<b>Product Thickness</b>	3.5mm
<b>Product Finish or Colour</b>	Black (BLK)
<b>Product Material</b>	Nylon
<b>Includes Fixing Screws</b>	No
<b>Fire Tested</b>	No
<b>Acoustic Rated to AS1191 and ISO140.3</b>	No
<b>Suitable for Smoke Doors</b>	No
<b>Suitable for Door Type</b>	Timber Doors
<b>Bush Fire Attack Level</b>	BAL <29
<b>Contains Intumescent Material</b>	No
<b>Seal Can Be Installed</b>	Rebated
<b>Brush / Gasket Length</b>	19mm
<b>Gasket Material</b>	Nylon Brush
<b>Max Door Gap</b>	19mm
<b>Self Adhesive</b>	No
<b>Product Warranty</b>	2 Years



### Raven RP2 Brush Seal 19mm - Brush Only

Scan to view online and for additional product information , or call us on **1800 555 600**.

Print Date: 23/4/24

ADDITIONAL IMAGES



**Raven RP2 Brush Seal 19mm - Brush Only**

Scan to view online and for additional product information , or call us on **1800 555 600**.

Print Date: 23/4/24