




Raven RP2a Brush Seal 19mm - Clear Anodised Aluminium

RP2A

PRODUCT OPTIONS

Door Seal Length: 1000mm
1250mm
2000mm
2250mm
2500mm
3000mm

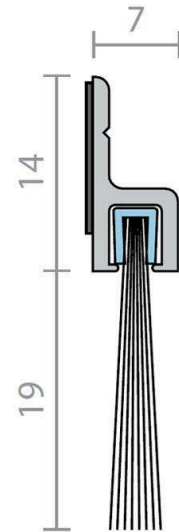

DESCRIPTION

A nylon brush strip seal with an anodised aluminium carrier that mounts to the inside or outside of a door. It is ideal for sliding or double acting doors.

Can be concealed inside of an aluminium door suite bottom rail by the fabricator.

Used in conjunction with Raven threshold plates.

Location: Bottom of single, double, sliding and double acting doors.

Min/Max Gap: Up to 19mm (user determined).

Finish: Satin clear (silver), bronze anodised aluminium (15micron) or paint at extra cost.

Fixing: Self adhesive or can be screw fixed. Note: Contact surface must be clean, smooth and if painted, well cured.

Seal: Black fine, dense, UV stabilised nylon filaments.

Sizes: Available in stock lengths.

Approvals

Energy NCC Pt. 3.12.3.3 & J3.4.

Fire Approved when used on a garage in accordance with AS 3959.

SPECIFICATION

| | |
|--|-------------------------------|
| MPN | A2AC |
| Brand | Raven |
| Product Height | 33mm |
| Product Warranty | 2 Years |
| Product Thickness | 7mm |
| Product Finish or Colour | Clear Anodised (CA) |
| Product Material | Aluminium |
| Includes Fixing Screws | Yes |
| Fire Tested | No |
| Acoustic Rated to AS1191 and ISO140.3 | No |
| Suitable for Smoke Doors | No |
| Suitable for Door Type | Timber Doors, Aluminium Doors |
| Bush Fire Attack Level | BAL <29 |
| Contains Intumescent Material | No |
| Seal Can Be Installed | Surface Fix |
| Brush / Gasket Length | 19mm |



Raven RP2a Brush Seal 19mm - Clear Anodised Aluminium

Scan to view online and for additional product information , or call us on **1800 555 600**.

Print Date: 2/5/24

| | |
|------------------------|-------------|
| Gasket Material | Nylon Brush |
| Max Door Gap | 19mm |
| Self Adhesive | Yes |

ADDITIONAL IMAGES



RP 82 Threshold Plate Not Included



Raven RP2a Brush Seal 19mm - Clear Anodised Aluminium

Scan to view online and for additional product information , or call us on **1800 555 600**.

Print Date: 2/5/24