




Raven RP74F Brush Seal 13mm - Clear Anodised Aluminium

RP74F

PRODUCT OPTIONS

Door Seal Length: 1250mm 3000mm



DESCRIPTION

A nylon brush strip seal that is ideal for sliding or double acting doors. Can also be used for the stiles of tilt-up doors. The brush houses a unique medium temperature fin, which is effective in the sealing of medium temperature smoke, noise and weather. Used in conjunction with Raven threshold plates

Location: Frames or bottoms of single, double, sliding and double acting doors as well as stiles of tilt up doors.

Min/Max Gap: Up to 13mm (user determined).

Finish: Satin clear (silver), bronze anodised aluminium (15micron) or paint at extra cost.

Fixing: Self adhesive or can be screw fixed. Note: Contact surface must be clean, smooth and if painted, well cured.

Seal: Black fine, dense, UV stabilised nylon filaments with a medium temperature smoke barrier fin.

Sizes: Available in stock lengths.

Approvals

Energy NCC Pt. 3.12.3.3 & J3.4.

Fire Approved when used on a garage in accordance with AS 3959.

SPECIFICATION

MPN A74FC
Brand Raven
Product Height 33mm
Product Thickness 7mm

Product Finish or Colour Clear Anodised (CA)


Product MaterialAluminiumIncludes Fixing ScrewsYesFire TestedYesAcoustic Rated to AS1191 and ISO140.3YesSuitable for Smoke DoorsYes

Suitable for Door Type Timber Doors, Aluminium Doors

Bush Fire Attack Level BAL <29
Contains Intumescent Material No
Seal Can Be Installed Surface Fix
Brush / Gasket Length 13mm
Gasket Material Nylon Brush
Max Door Gap 13mm



ADDITIONAL IMAGES

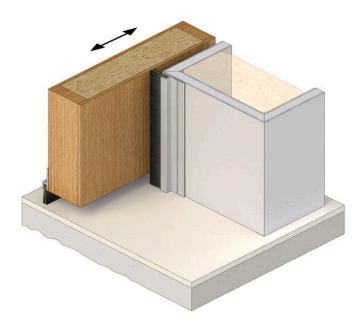



Print Date: 24/4/24