




# Raven RP74F Brush Seal 13mm - Clear Anodised Aluminium

RP74F

## PRODUCT OPTIONS

Door Seal Length: 1250mm  
3000mm

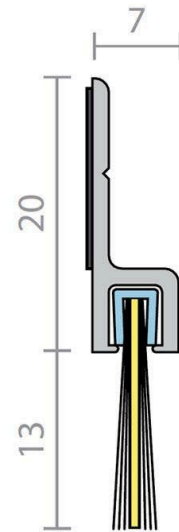

## DESCRIPTION

A nylon brush strip seal that is ideal for sliding or double acting doors. Can also be used for the stiles of tilt-up doors. The brush houses a unique medium temperature fin, which is effective in the sealing of medium temperature smoke, noise and weather. Used in conjunction with Raven threshold plates

Location: Frames or bottoms of single, double, sliding and double acting doors as well as stiles of tilt up doors.

Min/Max Gap: Up to 13mm (user determined).

Finish: Satin clear (silver), bronze anodised aluminium (15micron) or paint at extra cost.

Fixing: Self adhesive or can be screw fixed. Note: Contact surface must be clean, smooth and if painted, well cured.

Seal: Black fine, dense, UV stabilised nylon filaments with a medium temperature smoke barrier fin.

Sizes: Available in stock lengths.

Approvals

Energy NCC Pt. 3.12.3.3 & J3.4.

Fire Approved when used on a garage in accordance with AS 3959.

## SPECIFICATION

<b>MPN</b>	A74FC
<b>Brand</b>	Raven
<b>Product Height</b>	33mm
<b>Product Warranty</b>	2 Years
<b>Product Thickness</b>	7mm
<b>Product Finish or Colour</b>	Clear Anodised (CA)
<b>Product Material</b>	Aluminium
<b>Includes Fixing Screws</b>	Yes
<b>Fire Tested</b>	Yes
<b>Acoustic Rated to AS1191 and ISO140.3</b>	Yes
<b>Suitable for Smoke Doors</b>	Yes
<b>Suitable for Door Type</b>	Timber Doors, Aluminium Doors
<b>Bush Fire Attack Level</b>	BAL <29
<b>Contains Intumescent Material</b>	No
<b>Seal Can Be Installed</b>	Surface Fix
<b>Brush / Gasket Length</b>	13mm
<b>Gasket Material</b>	Nylon Brush



### Raven RP74F Brush Seal 13mm - Clear Anodised Aluminium


Scan to view online and for additional product information , or call us on **1800 555 600**.

Print Date: 20/5/25

**Max Door Gap**  
**Self Adhesive**

13mm  
Yes

## ADDITIONAL IMAGES

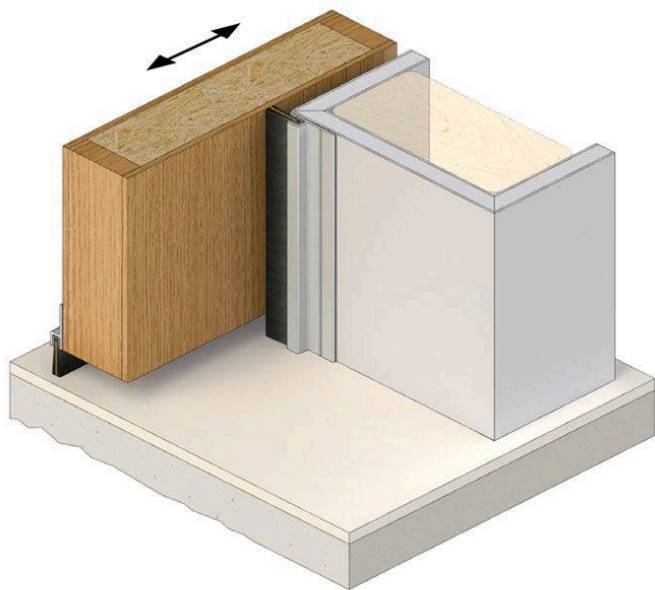

**Raven RP74F Brush Seal 13mm - Clear Anodised Aluminium**

Scan to view online and for additional product information , or call us on **1800 555 600**.

Print Date: 20/5/25