




Kilargo IS5176Asi Sweep Action Seal - Fin- Clear Anodised Aluminium

LO-IS5176ASI

PRODUCT OPTIONS

Door Seal Length: 1000mm
2250mm

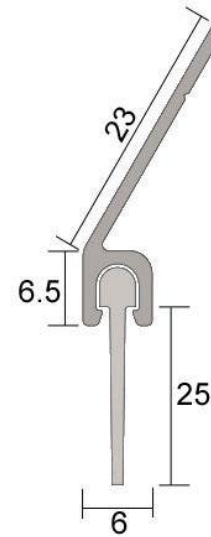

DESCRIPTION

The IS5176A seals are used to prevent ambient/medium temperature smoke, draught and dust penetration. The IS5176Asi seal is designed with a 45 degree angle aluminium carrier and is used around the perimeter of roller and tilt-up doors. The angled aluminium carriers can be fitted with either a 13mm, 19mm or 25mm silicone fin.

Standard Lengths

1000mm
2250mm
Also available in: 250mm increments from 1000mm to 5000mm (Special Order Only)

Standard Finishes

Silver anodised aluminium carrier with grey silicone fin
(Black silicone fins are also available upon request)

Fixing

Brush seals (within carriers) can be screw fixed or self-adhered to the desired surface
Fixing screws and aggressive backing tape are supplied

Approvals

Medium temperature smoke leakage approvals to AS1530 Part 7 available on proprietary door assemblies
Conforms with NCC Specification C3.4 smoke sealing requirements
Acoustically tested in accordance with AS1191, ISO140.3 and ISO10140-2

SPECIFICATION

MPN	IS5176ASI-13
Brand	Kilargo
Product Thickness	6mm
Product Finish or Colour	Clear Anodised (CA)
Product Material	Aluminium
Includes Fixing Screws	Yes
Fire Tested	No
Acoustic Rated to AS1191 and ISO140.3	Yes
Suitable for Smoke Doors	Yes



Kilargo IS5176Asi Sweep Action Seal - Fin- Clear Anodised Aluminium
Scan to view online and for additional product information , or call us on **1800 555 600**.

Print Date: 19/4/24

Suitable for Door Type	Timber Doors, Aluminium Doors
Contains Intumescent Material	No
Seal Can Be Installed	Surface Fix
Gasket / Seal Colour	Grey
Gasket Material	Silicon Impregnated
Self Adhesive	Yes
Product Warranty	2 Years



Kilargo IS5176Asi Sweep Action Seal - Fin- Clear Anodised Aluminium
*Scan to view online and for additional product information , or call us on **1800 555 600**.*

Print Date: 19/4/24