




Raven RP70 Automatic Door Bottom Seal - Clear Anodised Aluminium

RP70

PRODUCT OPTIONS

Door Seal Length: 920mm



DESCRIPTION

A heavy duty, fully morticed, automatic door bottom seal that is spring loaded to lift clear of the floor when the door is opened. It is self levelling and reversible for left and right handed operation. Acoustically designed, featuring an EPDM foam gasket for acoustic door applications. RP70 is operated automatically by pressure against the door jamb on its adjustable brass strike.

Location: Fully morticed into the bottom of single and double butt hinged doors (minimum door thickness of 45mm). For double doors, plain meeting stiles are required.

Min/Max Gap: 3mm to 13mm.

Finish: Satin clear (silver) anodised aluminium (15micron).

Fixing: Screw fix. Colour matched escutcheon plates and zinc plated, cross recess head S.T. screws supplied.

Seal:RP338. Black EPDM sponge (SE).

Sizes: 1500mm, 1220mm, 1070mm, 920mm, 610mm, 450mm to 300mm(min). Seals cut back to exact size.

Approvals

Acoustic AUS/NZ: NCC Spec. F5.5.

UK/EU: Approved Document E. Rated to BS EN ISO 717.1. Fire AUS/NZ: NCC Spec. C3.4. AS1530.4 & AS/NZS 1905.1.

UK/EU: Approved Document B. BS 476 Pt. 20 & 22 (similar to BS EN 1634-1).

FRL & FRR-/240/30 and FD240. Fire Approved

Energy NCC Pt. 3.12.3.3 & J3.4.

Design for Access and Mobility High efficiency mechanism to assist with the closing force requirements detailed in AS1428.1.

Durability Tested to over 1,000,000 operating cycles without failure.

SPECIFICATION

MPN A70C
Brand Raven
Product Height 45mm
Product Warranty 2 Years
Product Thickness 45mm

Product Finish or Colour Clear Anodised (CA)


Product MaterialAluminiumIncludes Fixing ScrewsYesFire TestedYesSuitable for Smoke DoorsYes



Acoustic Rated to AS1191 and ISO140.3 Yes

Suitable for Door Type Timber Doors Fire Zone **Bush Fire Attack Level Contains Intumescent Material** No Seal Can Be Installed Concealed **Gasket / Seal Colour** Black **Gasket Material EPDM Min Door Thickness** 45mm Min Door Gap 3mm **Max Door Gap** 13mm

ADDITIONAL IMAGES

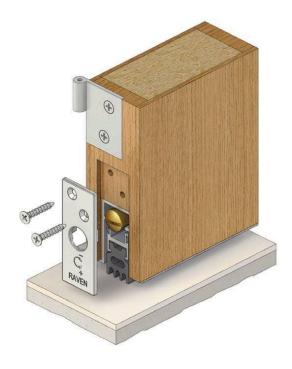



Print Date: 20/5/25