




Kilargo KG4002 Fire Door Intumescent Perimeter Upgrade Seal

LO-HP4002

PRODUCT OPTIONS

Door Seal Length:	1000mm
	2100mm
	2400mm
	2700mm
	3000mm
	Single Door Set (1x1000mm, 2x2100mm)
	Double Door Set (3x2100mm)
	Long Single Door Set (1x1000mm, 2x2750mm)
	Long Double Door Set (1x2000mm, 2x2750mm)
Product Finish or Colour:	Brown (BRN)
	Silver (SIL)
	White (WHT)



DESCRIPTION

Intumescent retro-fit seal for upgrading door perimeter gaps where the clearance exceeds the maximum 3mm specified by AS1905/1. Used to upgrade existing fire doors with up to and including 6mm perimeter gaps.

Can provide up to 2 hours fire resistance on proprietary fire doors.

Non compliant fire doors can be salvaged.

Cost-effective solution.

Easy retro-fit installation.

Ideal for fire engineered solutions where extra protection is necessary for life safety.

Gap Size

Upto and including 6mm perimeter gaps (dependant on fire door type).

Available Lengths

2100mm
2400mm
2700mm

Standard Colours

White
Silver
Can be painted on-site

Fixing

The KG4002 intumescent seal is simply applied to the top and sides of the door frame with two rows of aggressive self-adhesive tape. No screw fixing required.



Kilargo KG4002 Fire Door Intumescent Perimeter Upgrade Seal

Scan to view online and for additional product information , or call us on **1800 555 600**.

Print Date: 1/5/24


Approvals

Fire tested to AS1530 Part 4 for up to 2 hours on proprietary fire doors in accordance with AS1905 Part 1

SPECIFICATION

MPN	KG4002
Brand	Kilargo
Product Width	38mm
Product Height	1.6mm
Product Warranty	2 Years
Product Finish or Colour	Silver (SIL)
Product Material	PVC
Fire Tested	Yes
Suitable for Smoke Doors	No
Suitable for Door Type	Timber Doors, Aluminium Doors
Contains Intumescent Material	Yes
Gasket Material	Intumescent Impregnated PVC
Min Door Gap	1.6mm
Max Door Gap	6mm
Self Adhesive	Yes

ADDITIONAL IMAGES

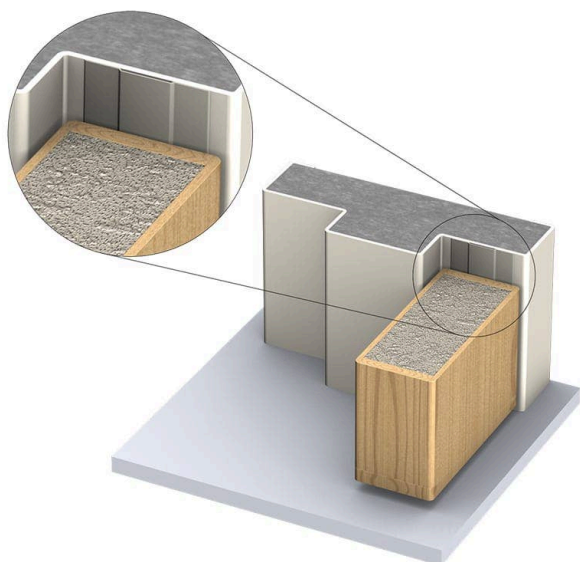

Kilargo KG4002 Fire Door Intumescent Perimeter Upgrade Seal

Scan to view online and for additional product information , or call us on **1800 555 600**.

Print Date: 1/5/24