



Kilargo IS1212 Flex-Wing Seal

LO-IS1212

PRODUCT OPTIONS

Door Seal Length: 1000mm

2100mm 2400mm 2700mm 3000mm

Single Door Set (1x1000mm, 2x2100mm)


Double Door Set (3x2100mm)

Long Single Door Set (1x1000mm, 2x2750mm)
Long Double Door Set (1x2000mm, 2x2750mm)

Finish or Colour*: Black (BLK)

Clear / Transparent (CLR)

White (WHT)



DESCRIPTION

Description

These self-adhesive perimeter seals are fitted in the rebate of a door frame to contain smoke, sound, draughts, dust and light. Strategically located in the impact free zone, the seal adheres to the frame quickly and easily without having to remove the door.

The seal consists of a semi-rigid flame retardant PVC carrier combined with twin elastomeric sealing blades. An aggressive self-adhesive backing tape is situated on both sides of the carrier.

NB. To ensure proper adhesion, contact surfaces must be clean & any paint well-cured.

Gap Size

2-3mm

Standard Colours

Black

White

(Dark brown and grey available to special order)

Approvals

Fire tested to AS1530 Part 4

Medium temperature smoke leakage approvals to AS1530 Part 7 available on proprietary door assemblies

Acoustic ratings to AS1191 and ISO140.3

Durability tests demonstrating over 100,000 open and close cycles

SPECIFICATION

MPN IS1212
Brand Kilargo
Product Width 12mm
Product Height 12mm



Kilargo IS1212 Flex-Wing Seal

Scan to view online and for additional product information, or call us on **1800 555 600**.

Print Date: 11/5/25

Product Warranty 2 Years

Product Material Flame Retardant PVC

Fire Tested Yes
Acoustic Rated to AS1191 and ISO140.3 Yes
Suitable for Smoke Doors Yes


Suitable for Door Type Timber Doors, Aluminium Doors

Contains Intumescent Material No
Seal Can Be Installed Surface Fix

Gasket Material Flame Retardant PVC

Min Door Gap2mmMax Door Gap3mmSelf AdhesiveYes

ADDITIONAL IMAGES

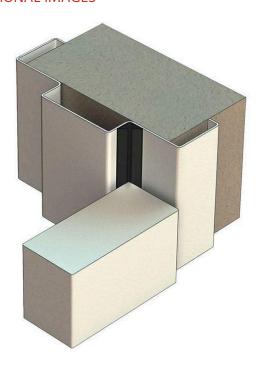



Print Date: 11/5/25