




Kilargo IS5120 Brush Seal 25mm - Clear Anodised Aluminium

LO-IS5120

PRODUCT OPTIONS

Door Seal Length: 1000mm
2250mm
2500mm

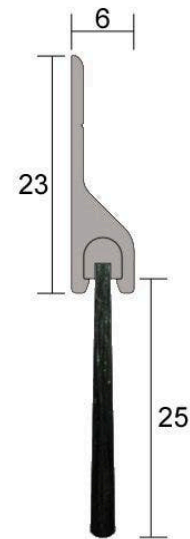

DESCRIPTION

These brush seals are designed to be used around the head & jambs, door bottom and meeting stiles of single or double swing doors, revolving, tilt-up and roller doors. These seals help protect against draught and dust, insects and weather penetration. The slim-line carriers are aesthetically angled to avoid dust build-up. The black nylon brush filaments, which are locked into a galvanized steel strip, are available fitted to an aluminium carrier, or as brush only.

Standard Lengths

1000mm
2250mm
2500mm
Also available in: 250mm increments from 1000mm to 3000mm (Special Order Only)

Fixing

Brush only seals can be mortised into a nominal 3mm (w) x 4mm (d) groove (with the length slightly kinked for an interference fit)

Approvals

Durability tests demonstrating over 100,000 open & close cycles

SPECIFICATION

| | |
|--|-------------------------------|
| MPN | IS5120 |
| Brand | Kilargo |
| Product Height | 48mm |
| Product Thickness | 6mm |
| Product Finish or Colour | Clear Anodised (CA) |
| Product Material | Aluminium |
| Includes Fixing Screws | Yes |
| Fire Tested | No |
| Acoustic Rated to AS1191 and ISO140.3 | No |
| Suitable for Smoke Doors | No |
| Suitable for Door Type | Timber Doors, Aluminium Doors |
| Contains Intumescent Material | No |
| Seal Can Be Installed | Surface Fix |
| Brush / Gasket Length | 25mm |



Kilargo IS5120 Brush Seal 25mm - Clear Anodised Aluminium

Scan to view online and for additional product information , or call us on **1800 555 600**.

Print Date: 26/4/24

Gasket Material
Self Adhesive
Product Warranty

Nylon Brush
Yes
2 Years



Kilargo IS5120 Brush Seal 25mm - Clear Anodised Aluminium
*Scan to view online and for additional product information , or call us on **1800 555 600**.*

Print Date: 26/4/24