




Raven RP129Si Door Bottom Sweep Seal 18mm - Clear Anodised Aluminium

RP129SI

PRODUCT OPTIONS

Door Seal Length: 1250mm 3000mm



DESCRIPTION

A heavy duty medium temperature smoke and weather door bottom seal. The RP129Si can be checked out or drilled to accommodate pivot hardware whilst still providing a continuous seal.

Use in conjunction with RP130Si and a Raven threshold plate (essential).

Location: Bottom of double butt hinged or centre pivot double acting doors.

Min/Max Gap: 14mm to 18mm.

Finish: Satin clear (silver) anodised aluminium (15micron) or paint at extra cost.

Fixing: Screw fix. Zinc plated, cross recess head S.T. screws supplied.

Seal: RP3129Si. Light grey silicon rubber (SE).

Sizes: Available in stock lengths.

Approvals

Fire Gasket flammability index 1 when tested to AS1530.2.

Smoke AUS/NZ: NCC Spec. C3.4. NZ BC Compliance Doc. C/AS1 6.19.2(b). AS1530.7 & BS EN 1634-3 (similar to BS 476 section 31.1). Meets smoke leakage rates specified in AS6905 & EN 13501-2 "Sa", "Sm".

Energy NCC Pt. 3.12.3.3 & J3.4.

Durability Tested to over 1,000,000 operating cycles without failure.

Registered Design.

SPECIFICATION

MPN A129SIC
Brand Raven
Product Height 18mm
Product Thickness 38mm

Product Finish or Colour Clear Anodised (CA)
Product Material Galvanised Steel

Includes Fixing ScrewsYesFire TestedNoAcoustic Rated to AS1191 and ISO140.3NoSuitable for Smoke DoorsYes

Suitable for Door Type Timber Doors, Aluminium Doors

Bush Fire Attack Level BAL<40



Raven RP129Si Door Bottom Sweep Seal 18mm - Clear Anodised Aluminium

Scan to view online and for additional product information, or call us on **1800 555 600**.


Print Date: 10/4/24

Contains Intumescent MaterialNoSeal Can Be InstalledSurface FixBrush / Gasket Length11mmGasket / Seal ColourGrey

Gasket Material Silicon Rubber

Max Door Gap18mmSelf AdhesiveNoProduct Warranty2 Years

ADDITIONAL IMAGES

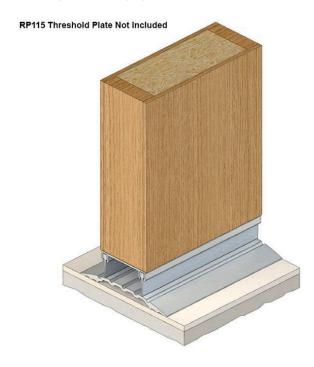



Print Date: 10/4/24