




# Raven RP500 Silicon Weather Strip

RP500

## PRODUCT OPTIONS

Roll Length: 24 Meters  
100 Meters  
Finish or Colour\*: Black (BLK)  
Brown (BRN)  
White (WHT)

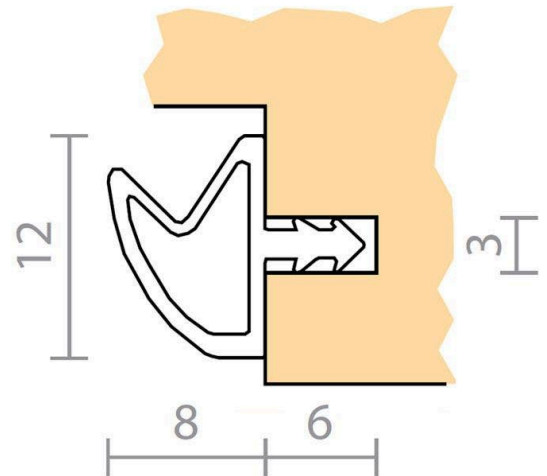

## DESCRIPTION

A compression seal, made from silicon. Raven silicon has a high resistance to permanent set (memory). It will not absorb water and is resistant to ozone and ultra-violet light deterioration.

Location: Aluminium, PVC or timber door and window frame grooves where dimensions suit.

Compression: 1mm to 3mm.

Finish: White, brown or black.

Fixing: Push-in locking fit into a 3mm x 6mm deep kerf groove.

Sizes: 100m, 24m.

### Approvals

Acoustic AUS/NZ: NCC Spec. F5.5.

UK/EU: Approved Document E. Rated to BS EN ISO 717.1.

Weather AUS/NZ: NCC various sections. AS2047, AS4055, AS4420 Pt. 0 to 5 & AS/NZS 1170.

UK/EU: Approved Document L1 & L2. Tests above are similar to BS 5368 & BS 7386.

Energy NCC Pt. 3.12.3.3 & J3.4.

## SPECIFICATION

<b>MPN</b>	B500B
<b>Brand</b>	Raven
<b>Product Height</b>	12mm
<b>Product Warranty</b>	2 Years
<b>Product Thickness</b>	14mm
<b>Product Material</b>	Silicon
<b>Includes Fixing Screws</b>	No
<b>Fire Tested</b>	No
<b>Acoustic Rated to AS1191 and ISO140.3</b>	Yes
<b>Suitable for Smoke Doors</b>	Yes
<b>Suitable for Door Type</b>	Timber Doors, PVC, Aluminium Doors
<b>Bush Fire Attack Level</b>	BAL <29
<b>Contains Intumescent Material</b>	No
<b>Seal Can Be Installed</b>	Rebated
<b>Gasket Material</b>	Silicon
<b>Min Door Gap</b>	1mm



### Raven RP500 Silicon Weather Strip

Scan to view online and for additional product information , or call us on **1800 555 600**.

Print Date: 9/5/25

**Max Door Gap**  
**Self Adhesive**

3mm  
No



**Raven RP500 Silicon Weather Strip**

*Scan to view online and for additional product information , or call us on **1800 555 600**.*

*Print Date: 9/5/25*